

Specifications:

Electrical:

1. Contact Resistance: 50 milliohms MAX
2. Insulation Resistance: 100MEGA ohms MIN
3. Dielectric Withstanding Voltage: 100 V AC AT Sea Level


Material:

1. Housing: Hing Temperature Thermoplastics, UI 94V-0 LCP Black
2. Contact: Copper Alloy C5191
3. Shell: Copper Alloy C2680

Finish:

1. Contact: Plated Gold in Mating Area; Tin On Solder Talls
2. Shell: Nickel Plating

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖	UNIT 單位	SCALE 比例	MINI USB1.1 5P FEMALE B TYPE SMT TYPE P.C.B. SMT TYPE PLASTIC POLARIZING PES 4.4mm MYLAR+REEL PACKING BLACK INSULATOR ROHS
DATE 制表日	PAGE 張數	UNIT 單位	PART NO.
2014/08/06	1 OF 2	M M	料號 C8320-05BFDXX1R
		REV. 版次	
		B	

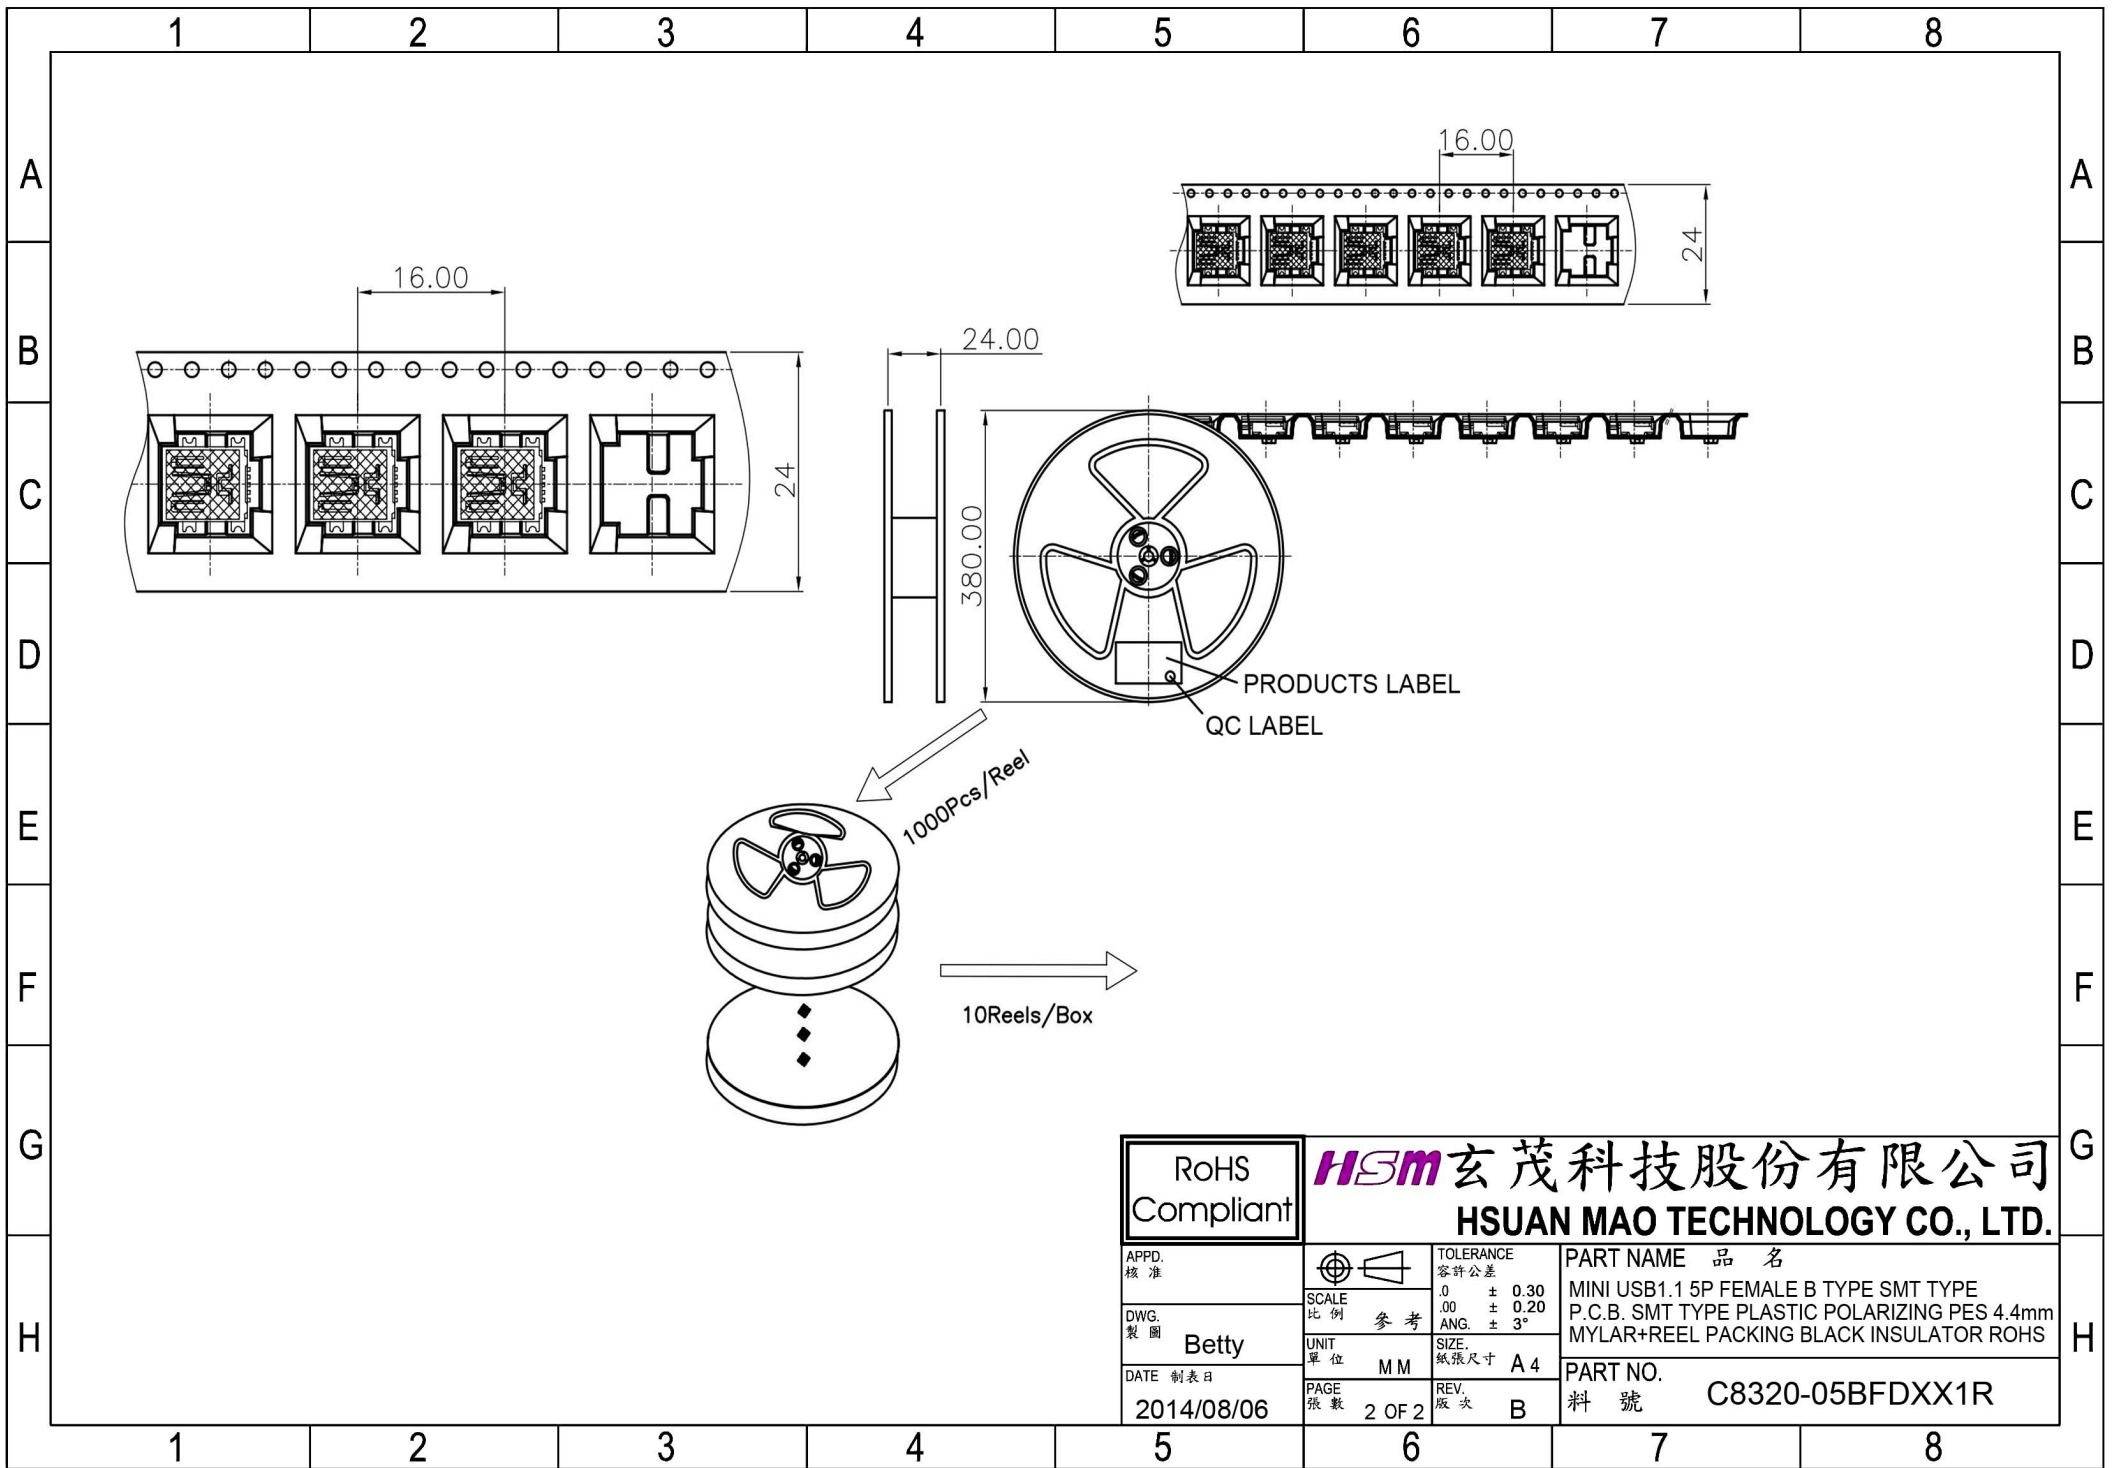

RoHS Compliant		 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 DATE 制表日 2014/08/06	Betty	 TOLERANCE 容許公差 .0 ± 0.30 .00 ± 0.20 ANG. ± 3° SCALE 比例 參考 UNIT 單位 MM PAGE 張數 2 OF 2	PART NAME 品名 MINI USB1.1 5P FEMALE B TYPE SMT TYPE P.C.B. SMT TYPE PLASTIC POLARIZING PES 4.4mm MYLAR+REEL PACKING BLACK INSULATOR ROHS PART NO. 料號 C8320-05BFDXX1R