


GNL-0603xx (0603 SMD TYPE) Ultra Brightness

ABSOLUTE MAXIMUM RATING:(Ta=25°C)

Parameter			Unit
DC Forward Current	30		mA
Reverse Voltage	5		V
Reverse Current (Vr=5V)	10		μA
Peak Forward Current ,tw ,=1 msec Duty ,=1/20	150		mA
Operation Temperature	-40	+80	°C
Storage Temperature	-40	+100	°C
Solder Dip Temperature (5 seconds,1.6mm from body)	300	±5	°C

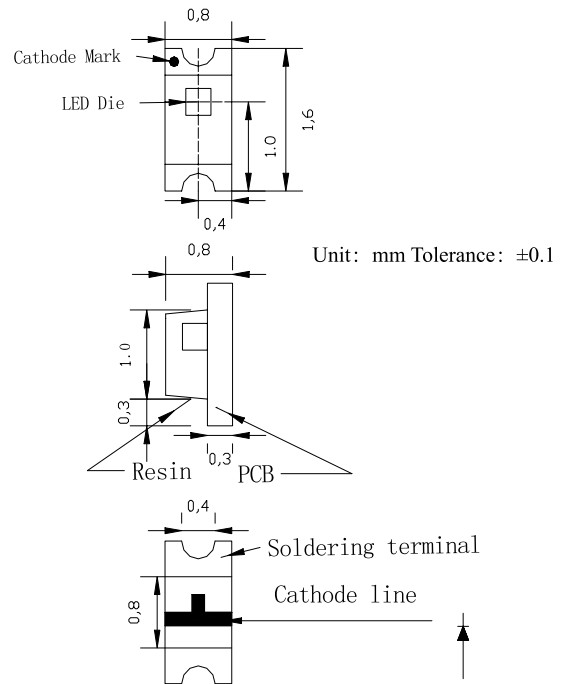

Features:

- Compatible with automatic placement equipment
- Compatible with reflow solder process

Applications:

- Automotive and Telecommunication
- General use for indicators

Part Number	EMITTED COLOR		Lens Color	Peak Wavelength (nm)	Vf (v) Typ.	IV (If=20mA) mcd		View Angle 2 θ 1/2
						Min.	Typ.	
GNL-0603GC	GaP	Green	Water Clear	567	2.0	7	12	120°
GNL-0603EC	GaP	Orange Red	Water Clear	635	2.0	10	18	120°
GNL-0603YC	GaAsP	Yellow	Water Clear	588	2.0	10	18	120°
GNL-0603SRC	GaAlAs	Red	Water Clear	660	2.0	20	30	120°
GNL-0603UEC	AlGaInP	Super Red	Water Clear	620	2.1	100	150	120°
GNL-0603UYC	AlGaInP	Super Yellow	Water Clear	587	2.1	100	150	120°
GNL-0603UYOC	AlGaInP	Super Amber	Water Clear	605	2.1	30	40	120°
GNL-0603UBC	InGaN	Super Blue	Water Clear	470	3.2	100	150	120°
GNL-0603PGC	InGaN	Super Pure Green	Water Clear	520	3.4	400	500	120°
GNL-0603WC	InGaN	Super White	Water Clear		3.2	700	800	120°