


C8303-XXLNJXB0R


W/ TAPE SEALED:  
C8303-XXSYJXB0R

W/O TAPE SEALED:  
C8303-XXSNJXB0R


NO.OF POS	DIM.A	DIM.B
02	6.02(0.237)	2.54(0.100)
03	8.56(0.337)	5.08(0.200)
04	11.10(0.437)	7.62(0.300)
05	13.64(0.537)	10.16(0.400)
06	16.18(0.637)	12.70(0.500)
07	18.72(0.737)	15.24(0.600)
08	21.26(0.837)	17.78(0.700)
09	23.80(0.937)	20.32(0.800)
10	26.34(1.037)	22.86(0.900)
12	31.42(1.237)	27.94(1.100)

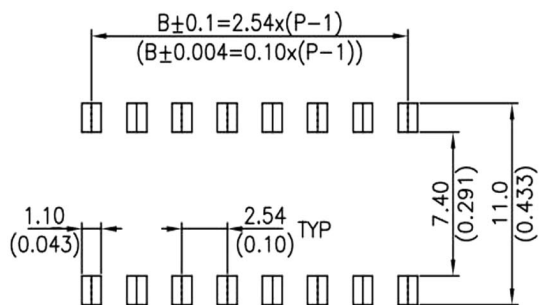

P.C.B. LAYOUT

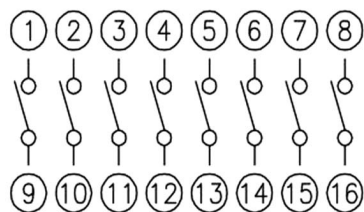

CIRCUIT DIAGRAM

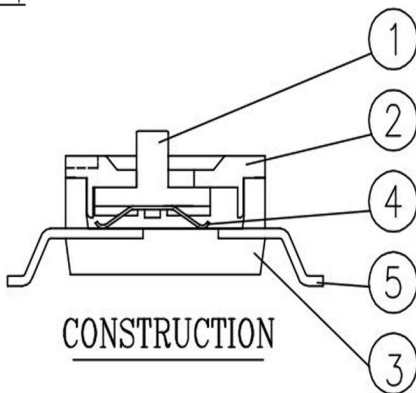

CONSTRUCTION

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 NYLON	MOLDED WHITE
2	COVER	UL94V-0 NYLON	MOLDED BLACK
3	BASE	UL94V-0 NYLON	MOLDED BLACK
4	CONTACT	BERYLLIUM COPPER	GOLD PLATED AT CONTACT AREA
5	TERMINAL	BRASS	GOLD PLATING

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准	SCALE 比例 参考	TOLERANCE 0-4 ±0.05 4-16 ±0.1 16-50 ±0.15	PART NAME 品名 DIP SWITCH SMT TYPE XXP GOLD 3U" PLATING BLACK COLOR ROHS
DWG. 製圖 Betty	UNIT 單位 MM	SIZE 紙張尺寸 A 4	PART NO. 料號 C8303-XXXXJXB0R
DATE 制表日 2016/06/01	PAGE 張數 1 OF 1	REV. 版次 D	