
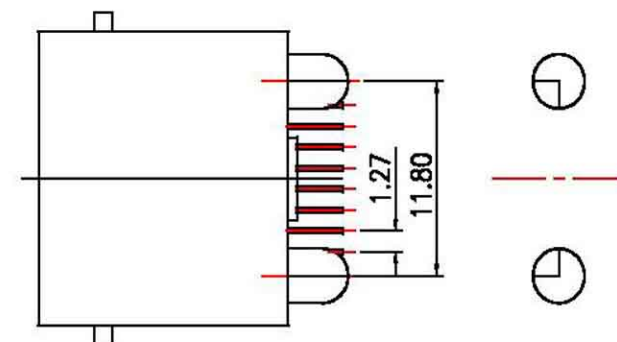
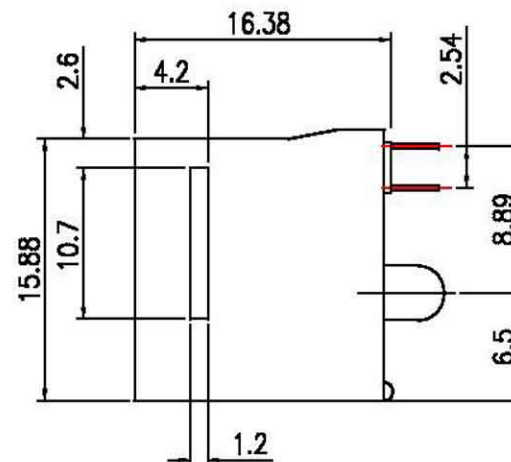


PCB Layout

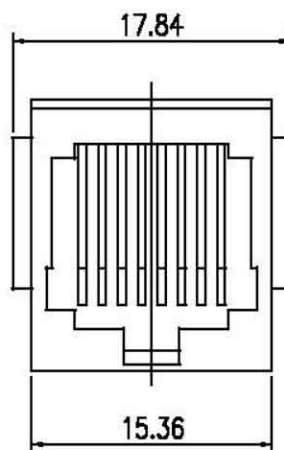

Materials

Housing: Glass filled Polyester UL94V-0, Black.  
 Contact: 0.45mm Diameter Phosphor Bronze Gold Plating  
 Over Nickel.

Electrical Characteristics:

Insulation Resistance: 500MΩ Min.  
 Contact Resistance: 30mΩ Max.  
 Withstand Voltage: 1000VAC 1minute.  
 Current Rating: 1.5A

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准		TOLERANCE 容許公差 0 ± 0.25 .00 ± ANG ±	PART NAME 品名 TOP ENTRY PCB JACK 8P8C W/PANEL STOP HALF ROUND FOOT BLACK COLOR ROHS
DWG. 製圖 <i>Helen</i>	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 C0052-88AHXB00R
DATE 制表日 2012/9/26	PAGE 張數 1 OF 1	REV. 版本 B	