

Features:



- Material: Phosphor bronze
- Used in H4030 series housing
- Wire range: #20 ~ #30 AWG
- Thickness: 0.2mm

Specifications:



- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

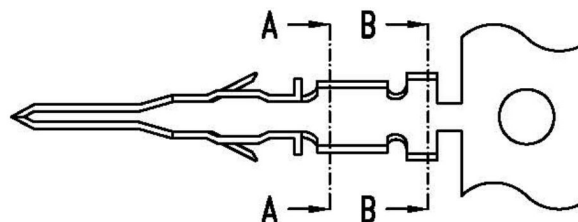

SEC. A-A

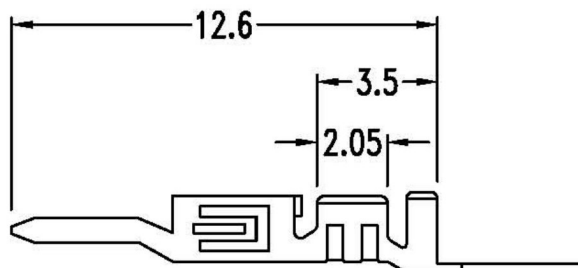

SEC. B-B

Ordering Information

Part No.	Finished	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
T4030-TPN00000R	Tin-plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9
T4030-SPN00000R	Gold flash in contact area. Others: Tin-plated					
T4030-GPN00000R	Gold flash					
T4030-TPG00000R	Tin-plated	#20 ~ #24 AWG	2.1	2.1	2.7	2.4
T4030-SPE00000R	Gold flash in contact area. Others: Tin-plated					
T4030-GPG00000R	Gold flash					

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准 Angel

DWG.
製圖 Yumi

DATE 制表日
2010/10/18

SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1

TOLERANCE
容許公差
.000 ± 0.05 (mm)
.00 ± 0.15 (mm)
.0 ± 0.25 (mm)

SIZE.
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名
MICRO-FIT 3.0 MALE TERMINAL
PHOSPHOR BRASS ROHS LOW-LEAD

PART NO.
料號 T4030-XXX00000R