

1 2 3 4 5 6 7 8

A

B

C

D

E

F

G

H

A

B

C




D

E

F

G

H

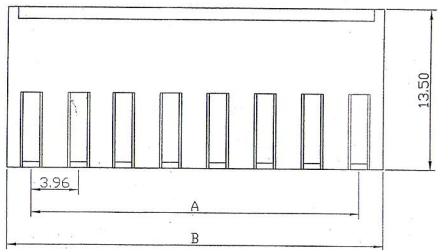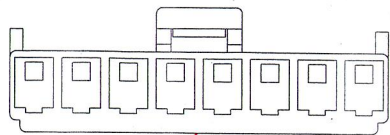

Specifications

Current Rating: 5A AC, DC  
 Voltage Rating: 250V AC Maximum  
 Operating Temp: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Terminal Material: Brass/Tin-plated  
 Material: Nylon 66, UL94V-0

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	3.96 (0.156)	8.04 (0.317)		
3	7.92 (0.312)	12.10 (0.476)		
4	11.88 (0.468)	15.96 (0.628)		
5	15.84 (0.624)	20.00 (0.787)		
6	19.80 (0.780)	23.90 (0.941)		
7	23.76 (0.935)	27.90 (1.098)		
8	27.72 (1.074)	31.86 (1.254)		
9	31.68 (1.247)	35.88 (1.413)		
10	35.64 (1.403)	39.84 (1.569)		
11	39.60 (1.559)	43.74 (1.722)		
12	43.56 (1.715)	47.74 (1.880)		
13	47.52 (1.871)	51.70 (2.035)		
14	51.48 (2.027)	55.66 (2.191)		

<b>RoHS Compliant</b>		<b>HSM 玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准 <i>Angel</i>	SCALE 比例 参考 1:1	TOLERANCE 容許公差 ±0.50 ±0.50 ±0.50	PART NAME 品名  3.96mm HOUSING WHITE ROHS LOW-LEAD
DWG. 製圖 <i>Jolin</i>	UNIT 單位 MM	SIZE 尺寸 A 4	PART NO. 料號 <b>H3967-XXPW0000R</b>
DATE 製圖日 2007/03/03	PAGE 張數 1 / 1	REV. 版本 A	

1 2 3 4 5 6 7 8