
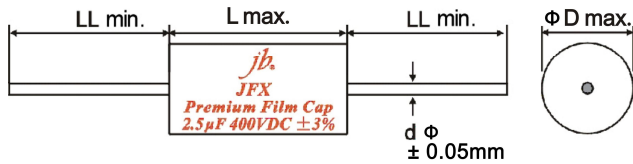


## Premium Metallized Polypropylene Film Capacitors – Axial – JFX

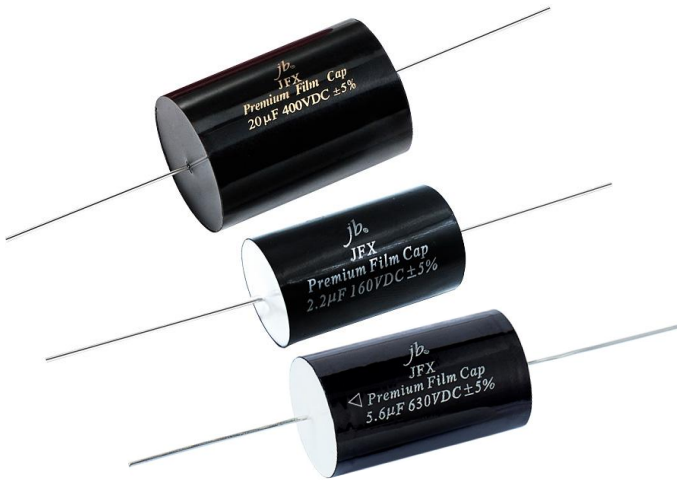

### FEATURES

- Quick transient design
- High Precise Capacitance  $\pm 3\%$ ,  $\pm 5\%$
- Very Low Dielectric absorption factor
- Very Low Dissipation factor
- Very Low ESR
- Very Low Inductance
- Excellent handling of high current audio pulses

### SPECIFICATIONS

|                                  |  |
|----------------------------------|--|
| Passive flammability             | GB10191-88 IEC384-16   |
| Operating temperature            | -55°C ~ +85°C  |
| Capacitance range                | 0.047 ~ 100µF  |
| Capacitance tolerance            | $\pm 3\%$ , $\pm 5\%$ 1KHz   |
| Rated voltage                    | 250V, 400V, 630V.DC  |
| Withstand voltage                | 1.5VR 5S   |
| Dissipation factor               | $\leq 0.0020$ 1KHz   |
| Insulate the electric resistance | CR $\leq 0.33 \mu F$ , I.R $\geq 15,000M\Omega$<br>CR $> 0.33 \mu F$ , I.R $\geq 5,000S$ |
| Leads Diameter                   | 0.8, 1.0 Tinned Pure Copper Wire   |

### STANDARD SIZE (mm)

For 0.047µF to 1µF, please consult to our sales for size.

| µF    | 250V          |      |      |     |    | µF    | 250V          |      |      |     |    |
|-------|---------------|------|------|-----|----|-------|---------------|------|------|-----|----|
|       | Dissipation   | ΦD   | L    | d   | LL |       | Dissipation   | ΦD   | L    | d   | LL |
| 1.0uF | $\leq 0.0005$ | 12.5 | 25   | 0.8 | 38 | 5.1uF | $\leq 0.0006$ | 21.5 | 31.5 | 0.8 | 38 |
| 1.1uF | $\leq 0.0005$ | 13   | 25   | 0.8 | 38 | 5.6uF | $\leq 0.0006$ | 22.5 | 31.5 | 0.8 | 38 |
| 1.2uF | $\leq 0.0005$ | 11.5 | 31.5 | 0.8 | 38 | 6.0uF | $\leq 0.0006$ | 23   | 31.5 | 0.8 | 38 |
| 1.3uF | $\leq 0.0005$ | 12   | 31.5 | 0.8 | 38 | 6.2uF | $\leq 0.0006$ | 23.5 | 31.5 | 0.8 | 38 |
| 1.5uF | $\leq 0.0005$ | 12.5 | 31.5 | 0.8 | 38 | 6.8uF | $\leq 0.0007$ | 24   | 31.5 | 0.8 | 38 |
| 1.6uF | $\leq 0.0005$ | 13   | 31.5 | 0.8 | 38 | 7.0uF | $\leq 0.0007$ | 19.5 | 46   | 0.8 | 38 |
| 1.8uF | $\leq 0.0005$ | 13.5 | 31.5 | 0.8 | 38 | 7.5uF | $\leq 0.0007$ | 20.5 | 46   | 0.8 | 38 |
| 2.0uF | $\leq 0.0005$ | 14   | 31.5 | 0.8 | 38 | 8.0uF | $\leq 0.0007$ | 21   | 46   | 0.8 | 38 |
| 2.2uF | $\leq 0.0005$ | 14.5 | 31.5 | 0.8 | 38 | 8.2uF | $\leq 0.0007$ | 21   | 46   | 0.8 | 38 |
| 2.4uF | $\leq 0.0005$ | 15.5 | 31.5 | 0.8 | 38 | 9.1uF | $\leq 0.0007$ | 22.5 | 46   | 0.8 | 38 |
| 2.5uF | $\leq 0.0005$ | 15.5 | 31.5 | 0.8 | 38 | 10uF  | $\leq 0.0007$ | 23   | 46   | 1.0 | 38 |
| 2.7uF | $\leq 0.0005$ | 16   | 31.5 | 0.8 | 38 | 11uF  | $\leq 0.0007$ | 24.5 | 46   | 1.0 | 38 |
| 3.0uF | $\leq 0.0005$ | 17   | 31.5 | 0.8 | 38 | 12uF  | $\leq 0.0008$ | 25   | 46   | 1.0 | 38 |
| 3.3uF | $\leq 0.0006$ | 17.5 | 31.5 | 0.8 | 38 | 13uF  | $\leq 0.0008$ | 26   | 46   | 1.0 | 38 |
| 3.5uF | $\leq 0.0006$ | 18   | 31.5 | 0.8 | 38 | 14uF  | $\leq 0.0008$ | 27   | 46   | 1.0 | 38 |
| 3.6uF | $\leq 0.0006$ | 18.5 | 31.5 | 0.8 | 38 | 15uF  | $\leq 0.0008$ | 28   | 46   | 1.0 | 38 |
| 3.9uF | $\leq 0.0006$ | 19   | 31.5 | 0.8 | 38 | 16uF  | $\leq 0.0008$ | 29   | 46   | 1.0 | 38 |
| 4.0uF | $\leq 0.0006$ | 19   | 31.5 | 0.8 | 38 | 18uF  | $\leq 0.0008$ | 30.5 | 46   | 1.0 | 38 |
| 4.3uF | $\leq 0.0006$ | 19.5 | 31.5 | 0.8 | 38 | 20uF  | $\leq 0.0008$ | 32   | 46   | 1.0 | 38 |
| 4.5uF | $\leq 0.0006$ | 20   | 31.5 | 0.8 | 38 | 22uF  | $\leq 0.0009$ | 33.5 | 46   | 1.0 | 38 |
| 4.7uF | $\leq 0.0006$ | 20.5 | 31.5 | 0.8 | 38 | 24uF  | $\leq 0.0009$ | 35   | 46   | 1.0 | 38 |
| 5.0uF | $\leq 0.0006$ | 21   | 31.5 | 0.8 | 38 | 27uF  | $\leq 0.0009$ | 37   | 46   | 1.0 | 38 |

## Premium Metallized Polypropylene Film Capacitors – Axial – JFX

| μF   | 250V        |      |    |     |    | μF    | 250V        |      |    |     |    |
|------|-------------|------|----|-----|----|-------|-------------|------|----|-----|----|
|      | Dissipation | ΦD   | L  | d   | LL |       | Dissipation | ΦD   | L  | d   | LL |
| 28uF | ≤0.0009     | 34   | 56 | 1.0 | 38 | 51uF  | ≤0.0013     | 43.5 | 61 | 1.0 | 38 |
| 30uF | ≤0.001      | 35   | 56 | 1.0 | 38 | 55uF  | ≤0.0013     | 45   | 61 | 1.0 | 38 |
| 33uF | ≤0.001      | 36.5 | 56 | 1.0 | 38 | 56uF  | ≤0.0013     | 46   | 61 | 1.0 | 38 |
| 36uF | ≤0.0011     | 38   | 56 | 1.0 | 38 | 62uF  | ≤0.0014     | 48   | 61 | 1.0 | 38 |
| 39uF | ≤0.0011     | 39.5 | 56 | 1.0 | 38 | 68uF  | ≤0.0014     | 39.5 | 61 | 1.0 | 38 |
| 41uF | ≤0.0012     | 40.5 | 56 | 1.0 | 38 | 75uF  | ≤0.0014     | 42   | 61 | 1.0 | 38 |
| 43uF | ≤0.0012     | 41.5 | 56 | 1.0 | 38 | 82uF  | ≤0.0014     | 43.5 | 61 | 1.0 | 38 |
| 45uF | ≤0.0012     | 41   | 61 | 1.0 | 38 | 91uF  | ≤0.0014     | 45.5 | 61 | 1.0 | 38 |
| 47uF | ≤0.0012     | 42   | 61 | 1.0 | 38 | 100uF | ≤0.0014     | 46   | 61 | 1.0 | 38 |
| 50uF | ≤0.0013     | 43   | 61 | 1.0 | 38 | --    | --          | --   | -- | --  | -- |

| μF    | 400V        |      |      |     |    | μF    | 400V        |      |    |     |    |
|-------|-------------|------|------|-----|----|-------|-------------|------|----|-----|----|
|       | Dissipation | ΦD   | L    | d   | LL |       | Dissipation | ΦD   | L  | d   | LL |
| 1.0uF | ≤0.0005     | 14.5 | 25   | 0.8 | 38 | 7.0uF | ≤0.0007     | 23.5 | 46 | 0.8 | 38 |
| 1.1uF | ≤0.0005     | 13   | 31.5 | 0.8 | 38 | 7.5uF | ≤0.0007     | 24   | 46 | 0.8 | 38 |
| 1.2uF | ≤0.0005     | 13.5 | 31.5 | 0.8 | 38 | 8.0uF | ≤0.0007     | 25   | 46 | 0.8 | 38 |
| 1.3uF | ≤0.0005     | 14   | 31.5 | 0.8 | 38 | 8.2uF | ≤0.0007     | 25.5 | 46 | 0.8 | 38 |
| 1.5uF | ≤0.0005     | 14.5 | 31.5 | 0.8 | 38 | 9.1uF | ≤0.0007     | 26.5 | 46 | 0.8 | 38 |
| 1.6uF | ≤0.0005     | 15   | 31.5 | 0.8 | 38 | 10uF  | ≤0.0007     | 28   | 46 | 1.0 | 38 |
| 1.8uF | ≤0.0005     | 16   | 31.5 | 0.8 | 38 | 11uF  | ≤0.0007     | 29.5 | 46 | 1.0 | 38 |
| 2.0uF | ≤0.0005     | 16.5 | 31.5 | 0.8 | 38 | 12uF  | ≤0.0008     | 30.5 | 46 | 1.0 | 38 |
| 2.2uF | ≤0.0005     | 17.5 | 31.5 | 0.8 | 38 | 13uF  | ≤0.0008     | 31.5 | 46 | 1.0 | 38 |
| 2.4uF | ≤0.0005     | 18   | 31.5 | 0.8 | 38 | 14uF  | ≤0.0008     | 32.5 | 46 | 1.0 | 38 |
| 2.5uF | ≤0.0005     | 18.5 | 31.5 | 0.8 | 38 | 15uF  | ≤0.0008     | 33.5 | 46 | 1.0 | 38 |
| 2.7uF | ≤0.0005     | 19   | 31.5 | 0.8 | 38 | 16uF  | ≤0.0008     | 31   | 56 | 1.0 | 38 |
| 3.0uF | ≤0.0005     | 20   | 31.5 | 0.8 | 38 | 18uF  | ≤0.0008     | 33   | 56 | 1.0 | 38 |
| 3.3uF | ≤0.0006     | 20.5 | 31.5 | 0.8 | 38 | 20uF  | ≤0.0008     | 34.5 | 56 | 1.0 | 38 |
| 3.5uF | ≤0.0006     | 21   | 31.5 | 0.8 | 38 | 22uF  | ≤0.0009     | 36.5 | 56 | 1.0 | 38 |
| 3.6uF | ≤0.0006     | 21.5 | 31.5 | 0.8 | 38 | 24uF  | ≤0.0009     | 38   | 56 | 1.0 | 38 |
| 3.9uF | ≤0.0006     | 22.5 | 31.5 | 0.8 | 38 | 27uF  | ≤0.0009     | 40   | 56 | 1.0 | 38 |
| 4.0uF | ≤0.0006     | 22.5 | 31.5 | 0.8 | 38 | 28uF  | ≤0.0009     | 41   | 56 | 1.0 | 38 |
| 4.3uF | ≤0.0006     | 23.5 | 31.5 | 0.8 | 38 | 30uF  | ≤0.001      | 42   | 56 | 1.0 | 38 |
| 4.5uF | ≤0.0006     | 24   | 31.5 | 0.8 | 38 | 33uF  | ≤0.001      | 44   | 56 | 1.0 | 38 |
| 4.7uF | ≤0.0006     | 19.5 | 46   | 0.8 | 38 | 36uF  | ≤0.0011     | 46   | 56 | 1.0 | 38 |
| 5.0uF | ≤0.0006     | 20   | 46   | 0.8 | 38 | 39uF  | ≤0.0011     | 48   | 56 | 1.0 | 38 |
| 5.1uF | ≤0.0006     | 20   | 46   | 0.8 | 38 | 41uF  | ≤0.0012     | 47   | 61 | 1.0 | 38 |
| 5.6uF | ≤0.0006     | 21   | 46   | 0.8 | 38 | 43uF  | ≤0.0012     | 48   | 61 | 1.0 | 38 |
| 6.0uF | ≤0.0006     | 22   | 46   | 0.8 | 38 | 45uF  | ≤0.0012     | 49   | 61 | 1.0 | 38 |
| 6.2uF | ≤0.0006     | 22   | 46   | 0.8 | 38 | 47uF  | ≤0.0012     | 50   | 61 | 1.0 | 38 |
| 6.8uF | ≤0.0007     | 23   | 46   | 0.8 | 38 | --    | --          | --   | -- | --  | -- |

## Premium Metallized Polypropylene Film Capacitors – Axial – JFX

| μF    | 630V        |      |      |     |    | μF     | 630V        |      |    |     |    |
|-------|-------------|------|------|-----|----|--------|-------------|------|----|-----|----|
|       | Dissipation | ΦD   | L    | d   | LL |        | Dissipation | ΦD   | L  | d   | LL |
| 1.0uF | ≤0.0005     | 16   | 31.5 | 0.8 | 38 | 5.0uF  | ≤0.0006     | 26.5 | 46 | 0.8 | 38 |
| 1.1uF | ≤0.0005     | 16.5 | 31.5 | 0.8 | 38 | 5.1uF  | ≤0.0006     | 27   | 46 | 0.8 | 38 |
| 1.2uF | ≤0.0005     | 17   | 31.5 | 0.8 | 38 | 5.6uF  | ≤0.0006     | 28   | 46 | 0.8 | 38 |
| 1.3uF | ≤0.0005     | 17.5 | 31.5 | 0.8 | 38 | 6.0uF  | ≤0.0007     | 29   | 46 | 0.8 | 38 |
| 1.5uF | ≤0.0005     | 19   | 31.5 | 0.8 | 38 | 6.2uF  | ≤0.0007     | 29   | 46 | 0.8 | 38 |
| 1.6uF | ≤0.0005     | 19.5 | 31.5 | 0.8 | 38 | 6.8uF  | ≤0.0007     | 30.5 | 46 | 0.8 | 38 |
| 1.8uF | ≤0.0005     | 20.5 | 31.5 | 0.8 | 38 | 7.0uF  | ≤0.0007     | 31   | 46 | 0.8 | 38 |
| 2.0uF | ≤0.0005     | 21.5 | 31.5 | 0.8 | 38 | 7.5uF  | ≤0.0007     | 32   | 46 | 0.8 | 38 |
| 2.2uF | ≤0.0005     | 22.5 | 31.5 | 0.8 | 38 | 8.0uF  | ≤0.0007     | 33   | 46 | 0.8 | 38 |
| 2.4uF | ≤0.0005     | 23.5 | 31.5 | 0.8 | 38 | 8.2uF  | ≤0.0007     | 33.5 | 46 | 0.8 | 38 |
| 2.5uF | ≤0.0005     | 24   | 31.5 | 0.8 | 38 | 9.1uF  | ≤0.0007     | 35   | 46 | 0.8 | 38 |
| 2.7uF | ≤0.0006     | 24.5 | 31.5 | 0.8 | 38 | 10.0uF | ≤0.0007     | 32.5 | 56 | 1.0 | 38 |
| 3.0uF | ≤0.0006     | 20.5 | 46   | 0.8 | 38 | 11.0uF | ≤0.0007     | 34   | 56 | 1.0 | 38 |
| 3.3uF | ≤0.0006     | 21.5 | 46   | 0.8 | 38 | 12.0uF | ≤0.0008     | 35.5 | 56 | 1.0 | 38 |
| 3.5uF | ≤0.0006     | 22   | 46   | 0.8 | 38 | 13.0uF | ≤0.0008     | 37   | 56 | 1.0 | 38 |
| 3.6uF | ≤0.0006     | 22.5 | 46   | 0.8 | 38 | 14.0uF | ≤0.0008     | 38   | 56 | 1.0 | 38 |
| 3.9uF | ≤0.0006     | 23.5 | 46   | 0.8 | 38 | 15.0uF | ≤0.0008     | 39.5 | 56 | 1.0 | 38 |
| 4.0uF | ≤0.0006     | 24   | 46   | 0.8 | 38 | 16.0uF | ≤0.0008     | 40.5 | 56 | 1.0 | 38 |
| 4.3uF | ≤0.0006     | 25   | 46   | 0.8 | 38 | 18.0uF | ≤0.0008     | 43   | 56 | 1.0 | 38 |
| 4.5uF | ≤0.0006     | 25.5 | 46   | 0.8 | 38 | 20.0uF | ≤0.0008     | 45.5 | 56 | 1.0 | 38 |
| 4.7uF | ≤0.0006     | 26   | 46   | 0.8 | 38 | --     | --          | --   | -- | --  | -- |

Please visit our website to get more update data, those data & specification are subject to change without notice.