

MDIN40W series

40W Constant Voltage Din Rail Power Supply



■ Features:

- Constant voltage design
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN Rail TS-35/7.5 or 15
- Universal input voltage range
- DC ok signal (Relay type)

CE SELV LPS

⊙ ELECTRICAL SPECIFICATION

MODEL	MDIN40W12	MDIN40W12
OUTPUT		
Rated Voltage	12V	24V
Rated Current	3.33A	1.7A
Current Range	0 ÷ 3.33A	0 ÷ 1.7A
Rated Power	40W	40W
No Output Voltage (max.)	12.6V	25.2V
Voltage Adjustment Range [6]	11.5 – 15V	23 – 29V
Line Regulation	± 0.5%	
Load Regulation	± 1%	
Voltage Tolerance [3]	± 5%	
Ripple & Noise (max.) [2]	400mV _{p-p}	
Setup, Rise Time [4]	max. 550ms, max. 15ms / 230VAC at full load	
Hold up Time (typ.)	55ms / 230VAC at full load	
INPUT		
Voltage Range	90 ÷ 264VAC	
Frequency Range	47 ÷ 63Hz	
Power Factor (typ.)	PF > 0.5 / 230VAC at full load	
Efficiency (typ.)	80%	82%
AC current (typ.)	0.4A / 230VAC, 0.7A / 115VAC,	
Inrush current (max.)	60A / 230VAC(25°C)	
No Load Power Consumption (max.)	1W	
PROTECTIONS		
Over Current	Range: 110 ÷ 140%	
	Type: hiccup mode. Recovers automatically after fault condition is removed.	
Short Circuit	Type: hiccup mode.	
Over Voltage	14 ÷ 17V	28 ÷ 35V
	Type: shut down output voltage. Re-power on to recovery.	
Over Temperature	Range: 110°C ± 10°C	
	Type: shut down output voltage. Re-power on to recovery.	

MDIN40W series

40W Constant Voltage Din Rail Power Supply



WORKING ENVIRONMENT

Working Temperature	-20°C ÷ +50°C
Working Humidity	45 ÷ 85% RH non-condensing
Storage Temperature and Humidity	-30°C ÷ +70°C, 10 ÷ 95% RH non-condensing

SAFETY AND EMC REGULATIONS


Safety Standards	Compliance to EN62368-1
Withstand Voltage	IN/OUT: 3kVAC, IN/GND: 2kVAC, OUT/GND: 0.5kVAC
EMC Emission	Compliance to EN55032
EMC Immunity	Compliance to EN55024
Harmonic Current	Compliance to EN61000-3-2, EN61000-3-3

OTHERS

Dimensions	100 x 90 x 40mm (L x W x H)
Weight and Packing	0.28kg
EAN Code	 5 902135 123652  5 902135 123669

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.
6. By built-in potentiometer.

MECHANICAL SPECIFICATION

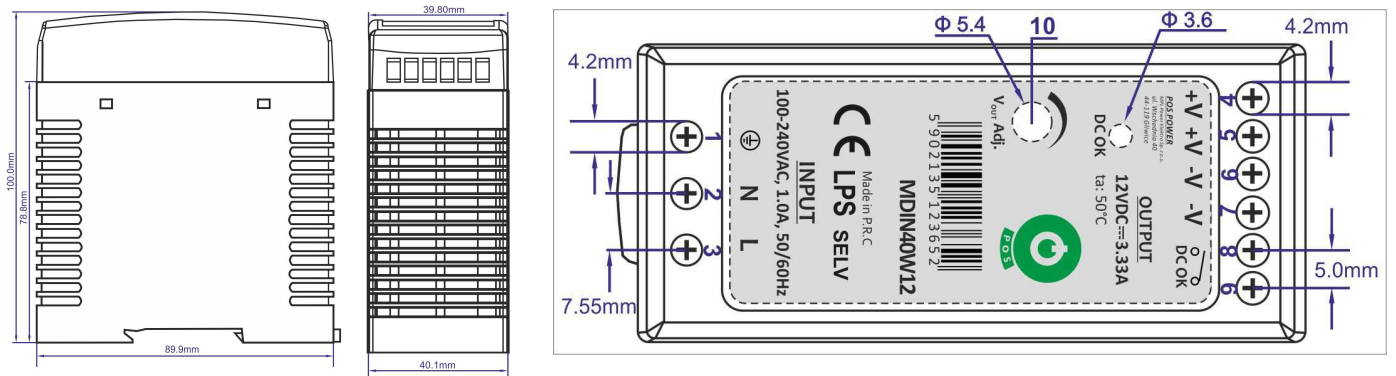

PIN ASSIGNMENT

No.	Assignment	No.	Assignment
1	Input: GND	6,7	Output: U _{OUT-}
2	Input: AC/N	8,9	Output: DCOK
3	Input: AC/L	10	U _{OUT} Potentiometer
4,5	Output: U _{OUT+}		