

MATERIAL:BRASS

THICKNESS:0.25

HARDNESS:SH

PLATING:TIN 40u' MIN

WIRE RANGE:(AWG)18-24#

INSULATION O.D.:3.7MAX.

VOITAGT RATING:AC,DC,250V

CURRENT RATING:AC,DC,10A

TEMPERATURE RANGE : -25°C TO +85°C

PACKING: 7KPCS/ROLL

DIMENSION:(MM)

T:0.25 ± 0.03

L:17.8 ± 0.35

E:10.8 ± 0.25

D1:3.0 ± 0.2

D:2.02 ± 0.03


IS:4.0 ± 0.35

WS:2.5 ± 0.35

H:3.2 ± 0.25

H1:2.6 ± 0.25

W:4.2 ± 0.3

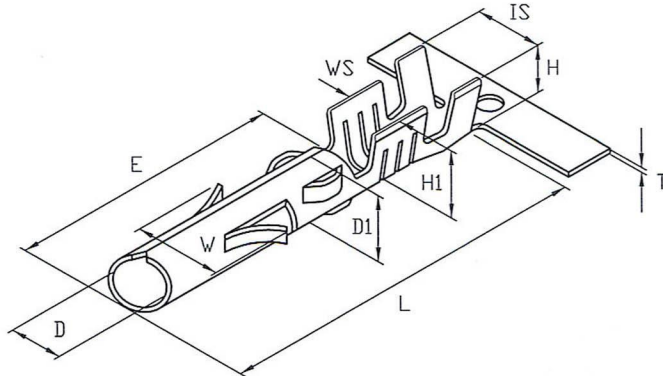

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 各种公差 0 ± .00 ± ANG. ±	PART NAME 品名 5.08mm FEMALE TERMINAL TIN PLATED MATERIAL:BRASS
DWG. 製圖 <i>Jolin</i>	SCALE 比例 參考	UNIT 單位 MM	SIZE 板張尺寸 A4
DATE 制表日 2006/06/07	PAGE 張數 1 OF 1	REV 版次 A	PART NO. 料號 T2430-TBD00000R