

MATERIALS





- HOUSING : HI.-TEMP.PLASTIC(UL 94V-0).BLACK
- TERMINAL : COPPER ALLOY.(t=0.15mm)
GOLD PLATED OVER NICKEL
- FORK : COPPER ALLOY. (t=0.20mm)
TIN PLATED OVER NICKEL

SPECIFICATION


- CURRENT RATING : 1.0 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000MΩ MIN. AT 500V DC.
- CONTACT RESISTANCE : 30mΩ MAX.
- OPERATING TEMPERATURE : -40°C TO +85°C.

115C-A X 0 0-R
1 2 3

- Type 3.ROHS
- A:6Pin
- Contact Plating
 - A:15u.g gold plating
 - B:3u.g gold plating
 - C:Gold Flash

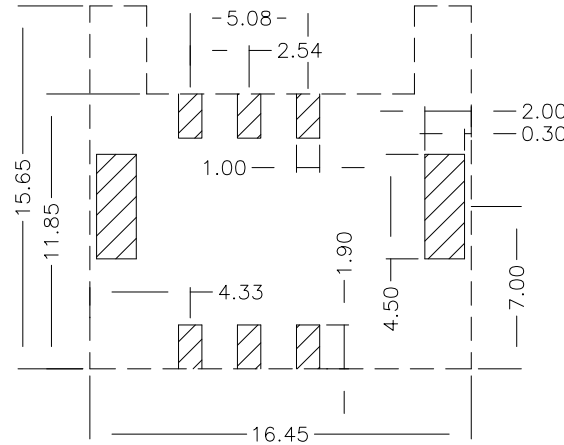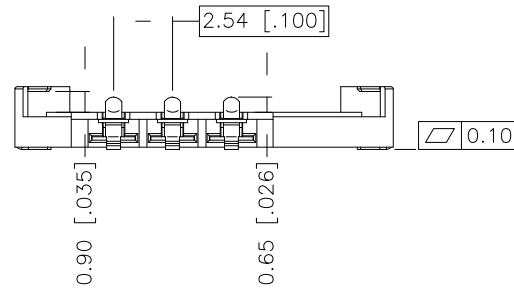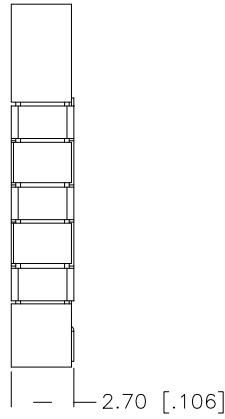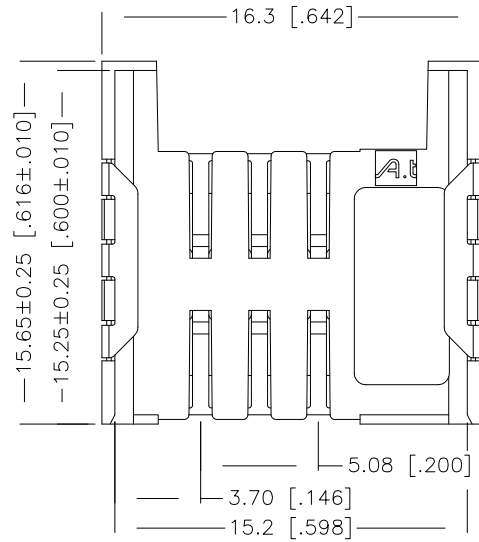

RECOMMEND P.C.B. LAYOUT
TOLERANCE ±0.05
TOP VIEW

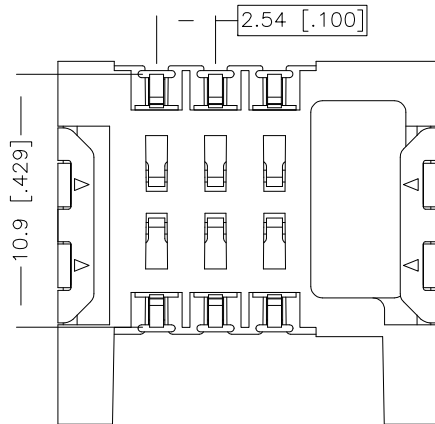

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±
.0	±0.25
.00	±0.20
SCALE: AS SHOWN	UNIT: mm
DRAWN Willis	2007/2/7
CHECKED	/ /
APPROVED	/ /
SIZE A4	REV.

Attend
ATTEND TECHNOLOGY INC.
www.attend.com.tw

DRAWN NAME:
SIM Card Socket
w/Card holder
PRODUCT NO. 115C-AX00-R
FILE NAME: 115C-AX00-R

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	