

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D

D

E

E

F






F

G

G

H

H

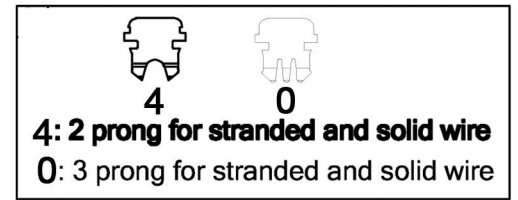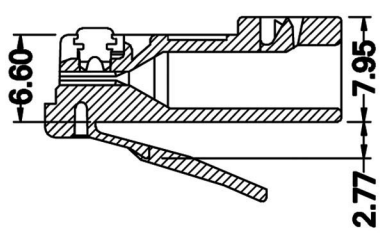

MATERIAL & FINISH

Body: PC. UL94V-2,
Contact: copper alloy, underplated with nickel,
and gold plated on contact region.

MECHANICAL SPECIFICATIONS

Temperature: -40°C to 85°C
Mating Cycles: 750 cycles min.

Tol: ±0.15 unless otherwise stated

ELECTRICAL SPECIFICATIONS

Voltage: 125 VAC
Current: 1.5 A
Contact Resistance: 30 milliohms max.
Insulation Resistance: 500 megohms min.
Dielectric Withstanding Voltage: 1000 VAC

RoHS Compliant		HSM 玄茂科技股份有限公司	
		HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖		SCALE 比例	
DATE 制表日	UNIT 單位	SIZE. 紙張尺寸	PART NO. 料號
2022/11/18	PAGE 張數	REV. 版本	
	Hedy	M M	A 4
		1 / 1	A
			C0021-88RANXX0R

1 2 3 4 5 6 7 8