

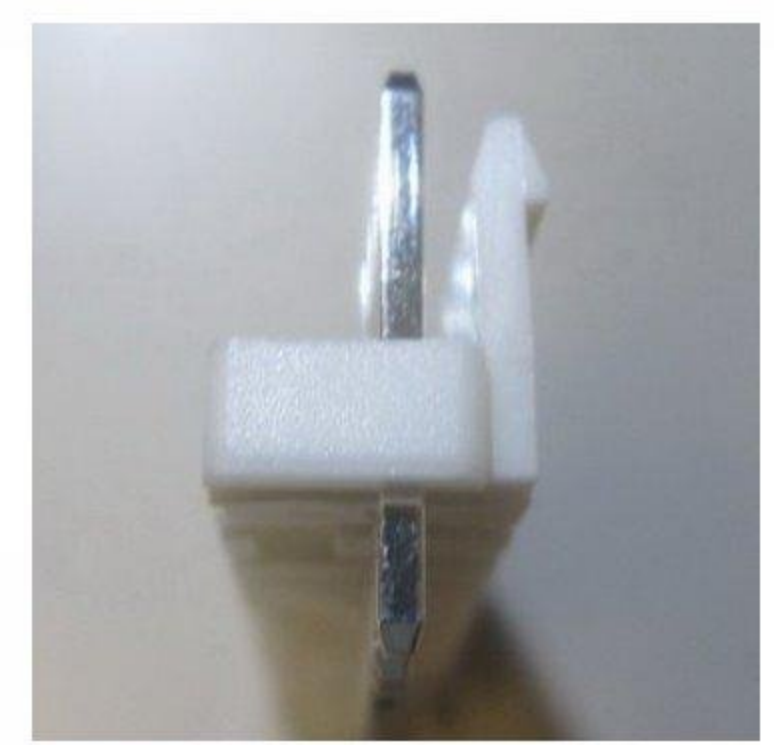


Specifications



Current Rating: 5A AC, DC
 Voltage Rating: 250V AC Maximum
 Operating Temp: -25°C ~ +85°C
 Contact Resistance: 10MΩ Max
 Insulation Resistance: 1000MΩ Min
 Terminal Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0

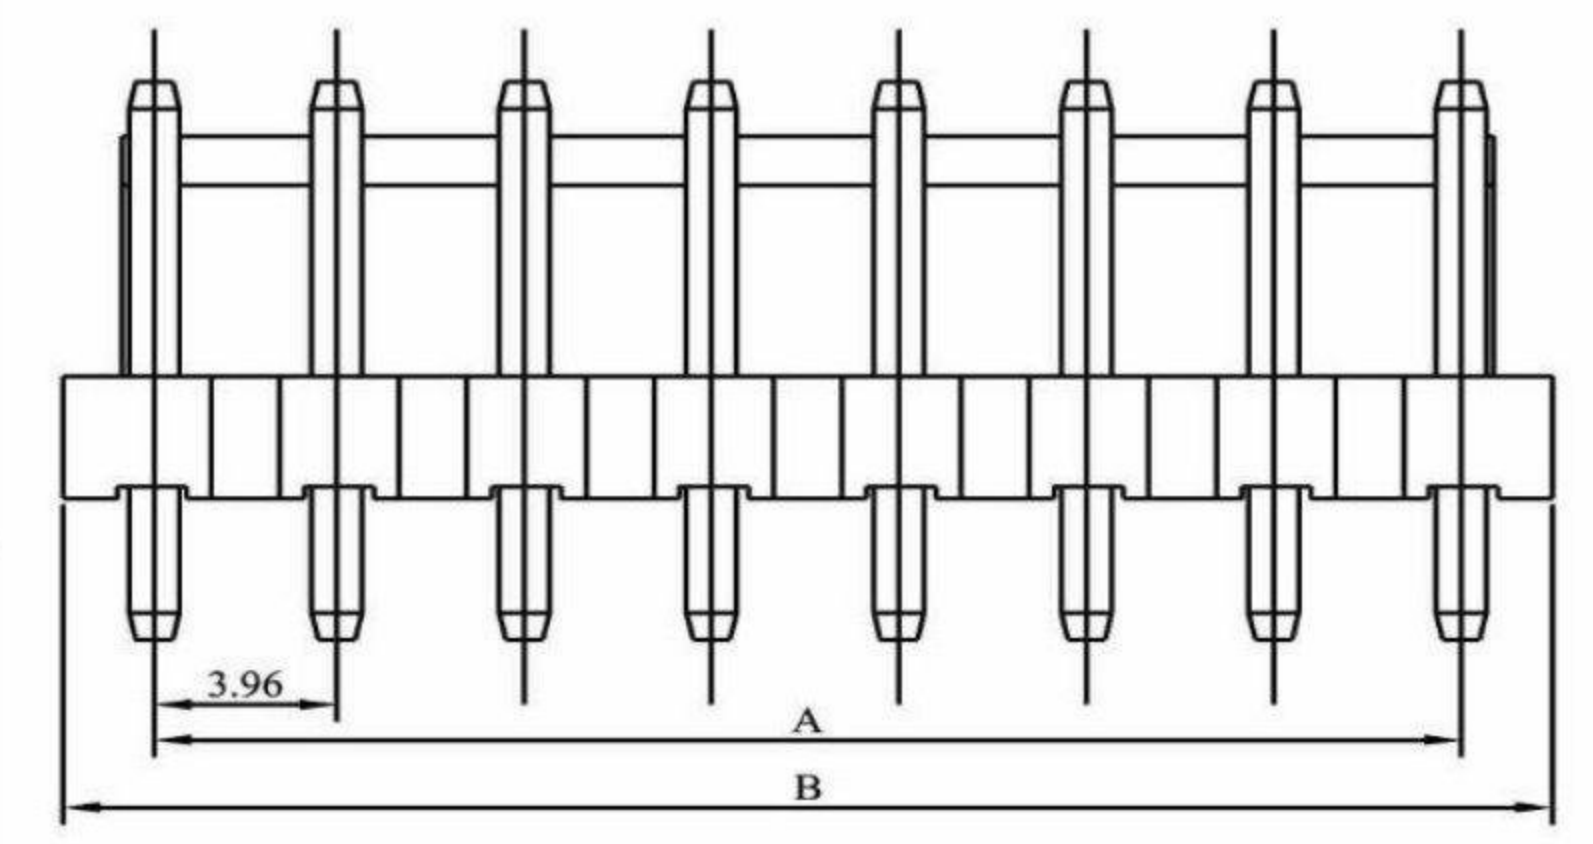

Poles	Dimension mm (in.)	
	A	B
2	3.96 (0.156)	7.92 (0.312)
3	7.92 (0.312)	11.92 (0.469)
4	11.88 (0.468)	15.84 (0.624)
5	15.84 (0.624)	19.84 (0.781)
6	19.80 (0.780)	23.80 (0.937)
7	23.76 (0.935)	27.88 (1.098)
8	27.72 (1.074)	31.74 (1.250)
9	31.68 (1.247)	35.86 (1.412)
10	35.64 (1.403)	39.90 (1.571)
11	39.60 (1.559)	43.84 (1.726)
12	43.56 (1.715)	47.92 (1.887)
13	47.52 (1.871)	51.72 (2.036)
14	51.48 (2.027)	55.92 (2.202)

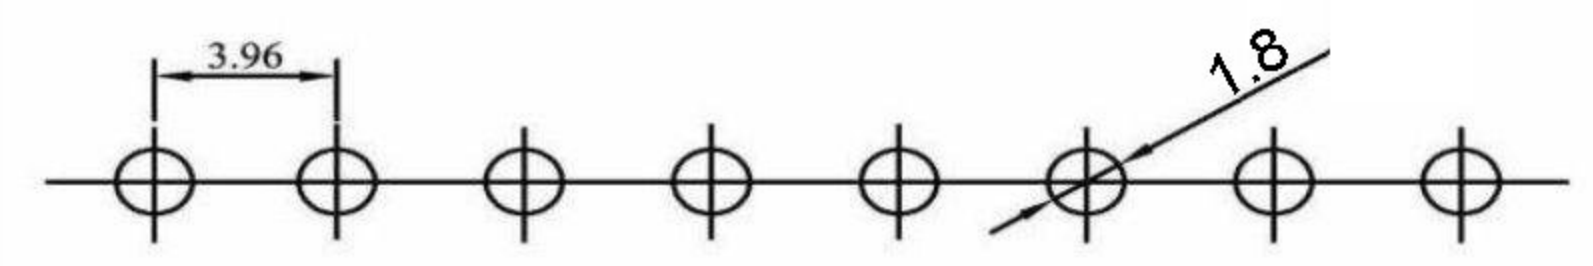

PCB LAYOUT COMPONENT SIDE

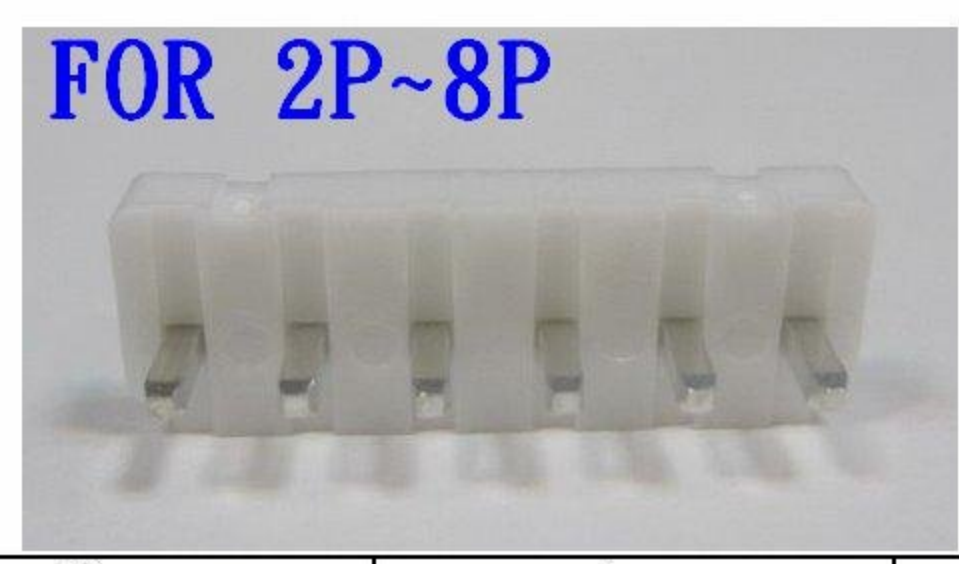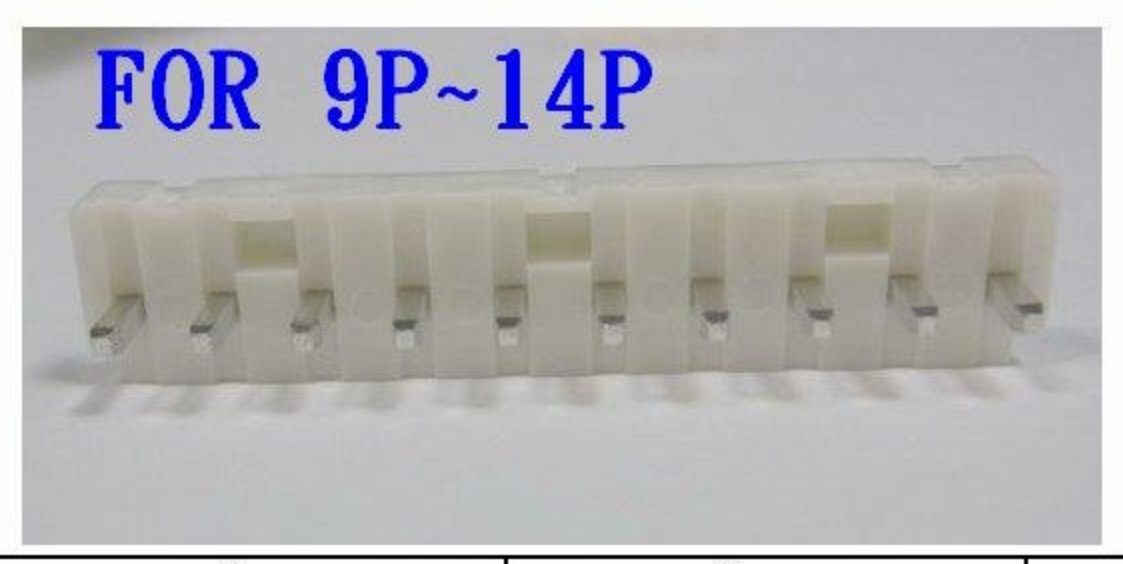

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 JST VH 3.96 WAFER 180°
DWG. 製圖 <i>kevin</i>	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 W3966-XXPSTW00R
DATE 制表日 2010/06/21	PAGE 張數 1 OF 1	REV. 版本 A	

Grid labels: 1-8 (columns), A-H (rows)