


REV	MODIFICATION	DATE
A/0	Initial issue	2016-04-01




WIRING TABLE:

<u>A</u>	<u>B</u>
1 ---Red---	1
2 ---White---	2
3 ---Green---	3
4 ---Black---	4
G ---DW+BD---	G

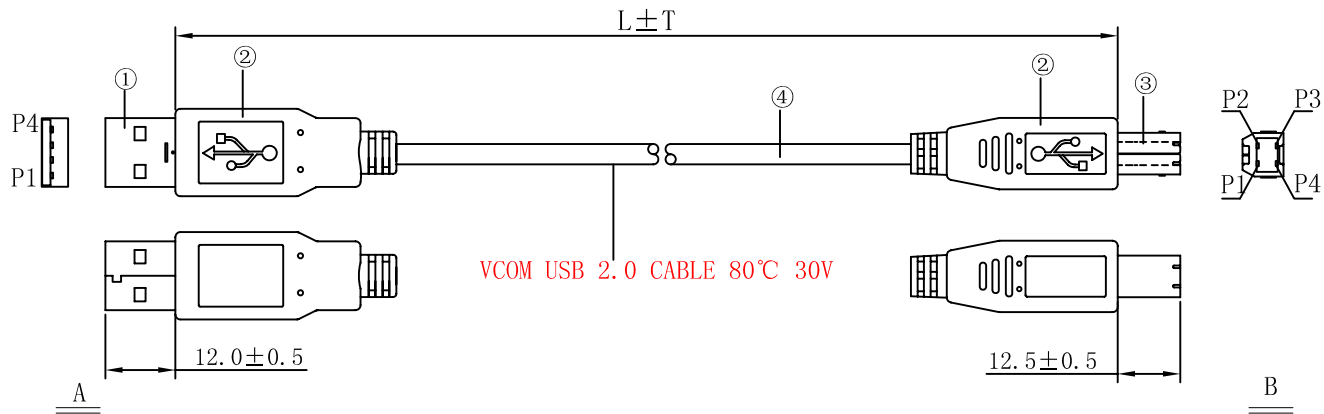

NO.	L	T
1	1500MM	20MM
2	1800MM	20MM
3	3000MM	30MM
4	4500MM	50MM
5	5000MM	50MM

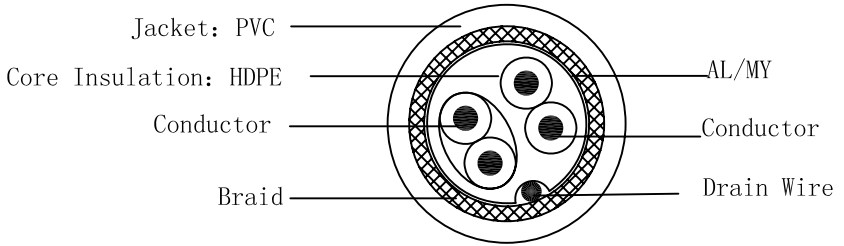

Test Conditions:
 1. 100% open & short circuit test;
 2. Insulation Resistance: 2.0Mohm (MIN);
 3. Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S .

VCOM INTERNATIONAL LTD.

ITEM	USBAM/BM	CUSTOMER	ETE	UNIT	mm	PAGE: 1 of 1
PART NO.	CUSTOMER NO.					
PRODUCT NO.	REV:	A/0	DATE	2016-04-01		
DRAWN BY:		CHECKED BY:		APPROVED BY:		

NO.	MATERIAL DESCRIPTION	UNIT	QTY
④	CABLE: [1P+2C+AL/MY+DW+BD], OD:4.5mm, PVC JACKET, BEIGE	M	1.5-5
③	USB B MALE SOLDERING TYPE, NICKEL-PLATED PBT WHITE COLOR	SET	1
②	OVER MOLDING: PVC-50P GRAY-BEIGE PVC	g	12.96
①	USB A MALE SOLDERING TYPE, NICKEL-PLATED PBT WHITE COLOR	SET	1