

圖號 DRAWING No. :

品名 NAME:Receptacle ITEM No. :

校訂版次 REVISIONS

版次	記述 DESCRIPTION	DATE	核可
4	更改產品尺寸	108.08.23	KEN


MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

NOTE:

1. MAXIMUM ELECTRICAL RATING: 75°C 300 VOLTS
2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR: BLUE
4. WIRE RANGE: 12-10 AWG / 4-6 mm²
INSULATED COLOR: YELLOW
5. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

2019.08.23

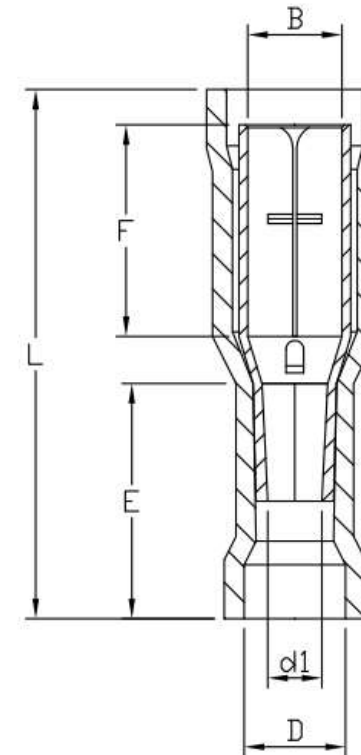


WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	B ±0.20	F ±0.50	L ±1.00	E ±0.50	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	ST-050/R	4.0	9.0	23.0	10.0	4.0	1.7	0.4
		4.5	9.0	23.0	10.0	4.0	1.7	0.4
16-14 AWG 1.5-2.5 mm ²		4.0	9.0	23.0	10.0	4.5	2.3	0.4
		4.5	9.0	23.0	10.0	4.5	2.3	0.4
12-10 AWG 4-6 mm ²		5.0	9.0	23.5	10.0	4.5	2.3	0.4
		5.0	9.0	24.5	13.0	5.5	3.4	0.4

認可 APPROVALS

製圖 DRAFT: TINA
設計 DESIGN: KEN
核可 CHECKED: ANDY

第三視角
THIRD VIEW



MATERIAL

INSULATION: VINYL
MATERIAL: BRASS
TIN PLATING

單位 UNIT

m/m
比例 SCALE

日期 DATE: 2015.01.05