

PANEL HOLE

±	Y
0.7~1.2	19.2
1.2~2	19.4
2~3	19.6

SPECIFICATION
 6(2)A 250VAC T125/55 1E4
 10A 125VAC
 (H): 10(4)A 250VAC T125/55 1E4
 10(2)A 250VAC T85/55 5E4
 16A 125V/10A 250VAC 1/3HP 125-250VAC T105


WATERPROOF CAP RL3-1-A-BB-1-P5-WP

Function		
A	2P2	ON-OFF
B	3P2	ON-ON
C	3P3	ON-OFF-ON
D	2P(ON)	(ON)-OFF
E	2P(OFF)	ON-(OFF)
F	3P2(ON)	ON-(ON)
G	3P3(ON)	(ON)-OFF-ON
3E	3P	ON-OFF
3E	ILLUMINATED	W/LAMP
IL	2P	INDICATOR LIGHT

Housing/Cap	
B	Black
W	White
GY	Grey
R	Red

Cap Printing	
0	None
1	●
2	○
3	○-
4	- =
5	=
6	=O
7	-O=
8	OFF ON

RATING	
T0A	125V
6A	250V
H	16A 125V 10A 250V

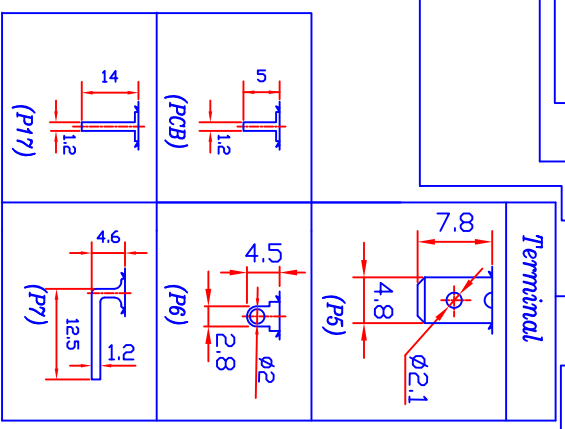

LIGHT Voltage	
1	110VAC
2	220VAC
3	12VDC
4	24VDC

WATERPROOF CAP	
WP	Nothing
WP-RL3-1	

NO.	DESCRIPTION	QTY	MATERIAL	SPECIFICATION	REMARK
DRAW BY	CHUIN	030510	SCALE	1 : 1	ITEM NO. RL3-1
DEGN BY	YANG		UNIT	MM	TITLE
APPD BY	RAY				ROCKER SWITCH

同利企業有限公司

TELE LONG ENTERPRISE CO.,LTD
 E-mail:rrayyang@seed.net.tw

DATE	DRAWG BY	REVISED

(RL3-1)