

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJC 12/08/06'
B	整理图纸	YCH 07/27/11'	~	

NOTES:

1. MATERIAL








- 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
- 1.2 CONTACT: COPPER ALLOY.

2. SPECIFICATION

- 2.1 TEMPERATURE RANGE:-40~+105°C.
- 2.2 CONTACT RESISTANCE:20mΩ max.
- 2.3 INSULATION RESISTANCE:1000MΩ min.
- 2.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.

3. PART NUMBER: DS1017

- DS1017- X X X X X
- HOUSING COLOR
G: GRAY
B: BLACK
L: BLUE
 - CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
2: NICKEL+GOLD FLASH
 - POLARIZATION
A: W/
B: W/O
 - STRAIN RELIEF
M: W/
N: W/O
 - No. OF CONTACTS
10 12 16 20 22 24 26
34 36 40 44 50 56 68

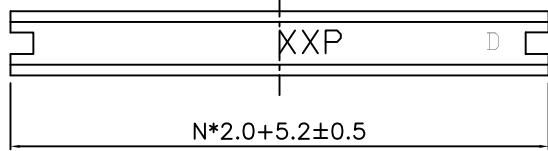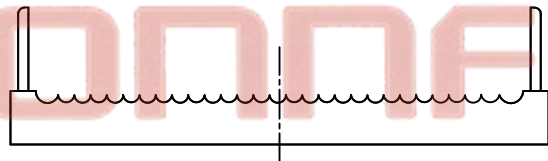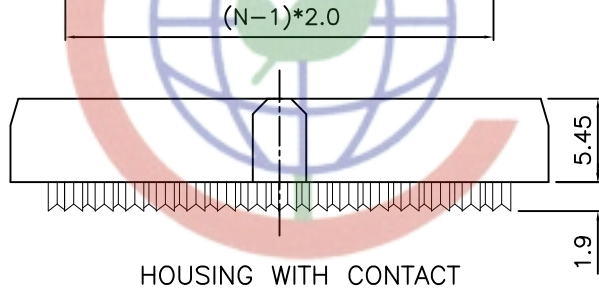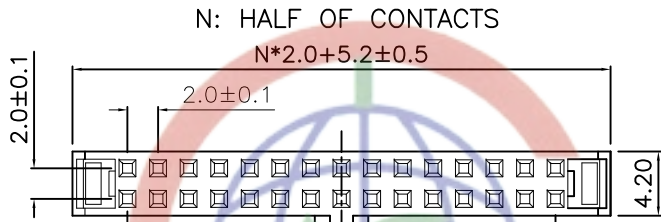

Tel:86-574-635087
 Fax:86-574-635108
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	IDC SOCKET PITCH 2.0mm WITH 1.0mm FLAT CABLE	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°		SHEET SIZE	A4	SERIES DS1017 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1017-XXXXX					