

POS-150-C series

150W Switching Power Supply (CV)



POS-150-5-C, POS-150-12-C

POS-150-24-C



■ Features:

- Constant voltage design
- Universal AC input range
- Protections: Short circuit / Overload / Over voltage / Over temperature (5V, 12V only)
- Cooling by free air convection



© ELECTRICAL SPECIFICATION

MODEL	POS-150-5-C	POS-150-12-C	POS-150-24-C
OUTPUT			
Rated Voltage	5V	12V	24V
Voltage Adjustment	4.5 ÷ 5.5V	10.0 ÷ 13.5V	21.5 ÷ 26.5V
Rated Current	22A	12.5A	6.5A
Current Range	0 ÷ 22A	0 ÷ 12.5A	0 ÷ 6.5A
Rated Power	110W	150W	156W
Line Regulation	± 1%	± 1%	± 1%
Load Regulation	± 1%	± 1%	± 1%
Voltage Tolerance [3]	± 1%	± 1%	± 1%
Ripple & Noise (max.) [2]	100mV _{p-p}	100mV _{p-p}	250mV _{p-p}
Setup, Rise Time, at full load [4]	200ms, 20ms / 230VAC		500ms, 80ms / 230VAC
Hold up Time (typ.)	30ms / 230VAC at full load		
INPUT			
Voltage Range	90 ÷ 132VAC, 180 ÷ 264VAC (selectable by switch)		
Frequency Range	47 ÷ 63Hz		
Power Factor (typ.)	PF > 0.6 / 230VAC at full load		
Efficiency (typ.)	88%	86%	88%
AC current (typ.)	1.7A / 230VAC, 3.0A / 115VAC		
Inrush current (max.)	60A / 230VAC(25°C)		
No Load Power Consumption (max.)	0.5W	0.5W	0.5W
PROTECTIONS			
Over Current	Range: 110 ÷ 150% Type: hiccup mode. Recovers automatically after fault condition is removed.		
Short Circuit	Type: hiccup mode. Recovers automatically after fault condition is removed.		
Over Voltage	Range: 120 ÷ 145% Type: shut down output voltage. Recovers automatically after fault condition is removed.		
Over Temperature (for 12V only)	Type: shut down output voltage. Re-power on to recovery.		

POS-150-C series

150W Switching Power Supply (CV)



WORKING ENVIRONMENT

Working Temperature	-20°C ÷ +70°C
Working Humidity	20 ÷ 90% RH non-condensing
Storage Temperature and Humidity	-40°C ÷ +80°C, 10 ÷ 95% RH non-condensing

SAFETY AND EMC REGULATIONS

Safety Standards	Compliance to EN60950-1
Withstand Voltage	IN/OUT: 1.5kVAC; IN/GND: 1.5kVAC; OUT/GND: 500VAC
EMC Emission	Compliance to EN55032, EN61000-3-2, EN61000-3-3
EMC Immunity	Compliance to EN55024

OTHERS

Dimensions	159 x 97 x 30mm (L x W x H)
Weight and Packing	5V, 12V: 0.45kg; 40pcs./ctn; ctn weight and dimensions: 18kg; 39 x 35.2 x 22.8cm 24V: 0.4kg; 40pcs./ctn; ctn weight and dimensions: 17.5kg; 44 x 30 x 21cm


EAN Code




1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

MECHANICAL SPECIFICATION

POS-150-5-C, POS-150-12-C

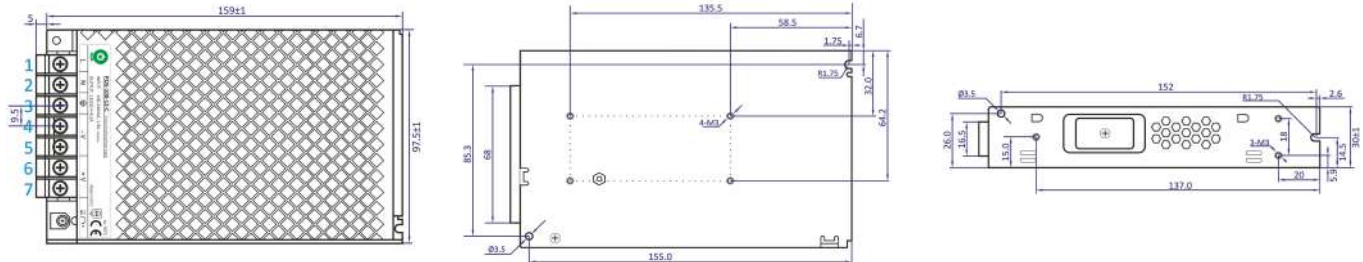

POS-150-24-C

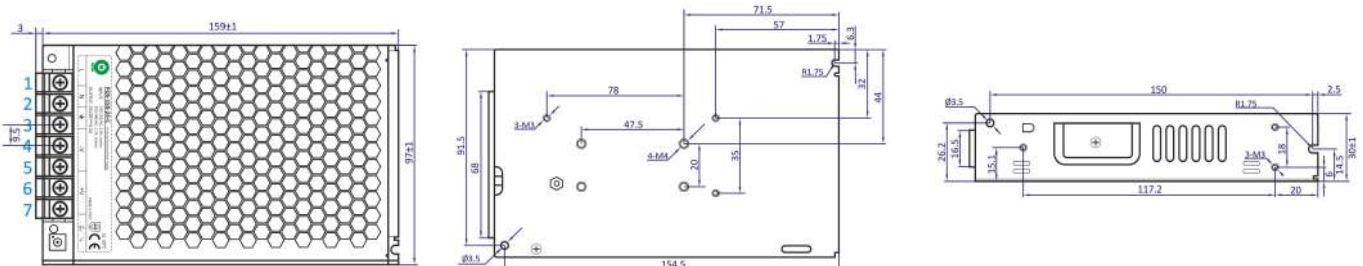

POS-150-C series


150W Switching Power Supply (CV)



PIN ASSIGNMENT

No.	Assignment	No.	Assignment
1	Input: AC/N	4,5	Output: U _{OUT-}
2	Input: AC/L	6,7	Output: U _{OUT+}
3	GND	SVR1, VR1	Output voltage adjustment

⊗ DERATING CURVE

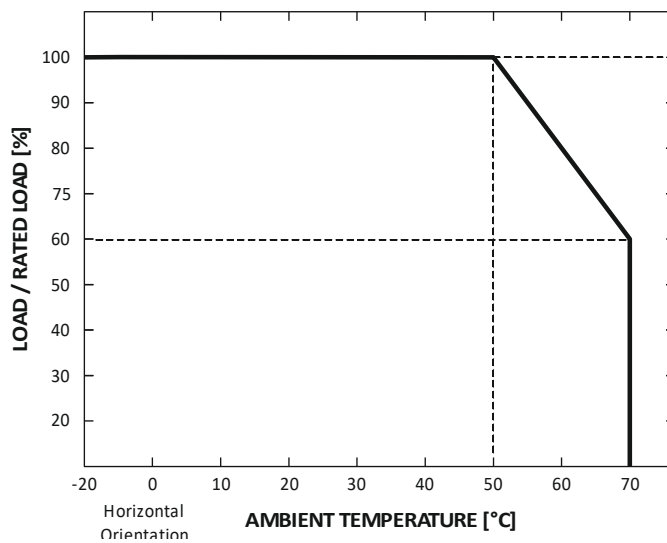

⊗ STATIC CHARACTERISTIC

