

圖號 DRAWING No. :		校訂版次 REVISIONS				
品名 NAME: BUTT CONNECTORS		ITEM No. :	版次	記述 DESCRIPTION	DATE	核可
			1	尺寸修改	104.09.16	ANDY




MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

NOTE:

1. MAXIMUM ELECTRICAL RATING: 75°C 300 VOLTS
2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm<sup>2</sup>
3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm<sup>2</sup>
4. WIRE RANGE: 12-10 AWG / 4-6 mm<sup>2</sup>
5. MATERIAL THICKNESS: t  
TOLERANCE: ±0.05

WIRE RANGE AWG/mm <sup>2</sup>	產品編號 ITEM NO.	L ±1.50	d ±0.30	D ±0.30	t
22-16 AWG 0.5-1.5 mm <sup>2</sup>		25.0	1.7	4.1	0.5
16-14 AWG 1.5-2.5 mm <sup>2</sup>	ST-060/B	25.0	2.3	4.5	0.5
12-10 AWG 4-6 mm <sup>2</sup>		26.0	3.4	6.5	0.7

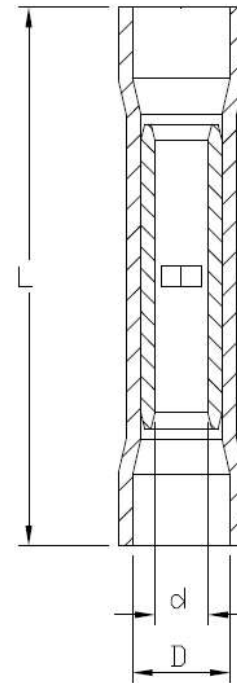

認可 APPROVALS		第三視角 THIRD VIEW 	MATERIAL	單位 UNIT	日期 DATE: 2015.01.05
製圖 DRAFT:	TINA		INSULATION: VINYL	m/m	
設計 DESIGN:	KEN		MATERIAL: BRASS STRIP	比例 SCALE	
核可 CHECKED:	ANDY		TIN PLATING		