

A&B: CUSTOMER LENGTH AVAILABLE  
N: HALF OF CONTACTS




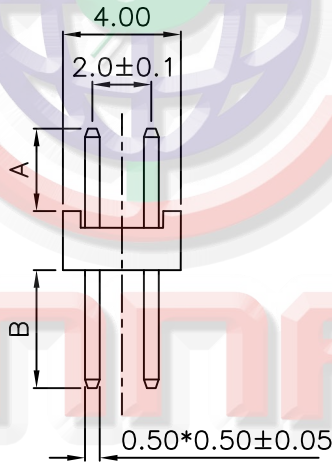


TABLE A:

TYPE	Dimension	
	A	B
1	2.80	4.00
2	3.50	5.08
3	10.00	2.00
4	2.80	10.20
5	4.00	8.00
6	2.50	4.30
7	2.80	3.90
8	3.00	3.50
9	3.00	3.80

TYPE	Dimension	
	A	B
10	2.80	5.50
11	3.00	3.70
12	2.20	4.60
13	3.00	6.00
14	2.40	5.00
15	2.70	8.50
16	2.80	11.00
17		
18		

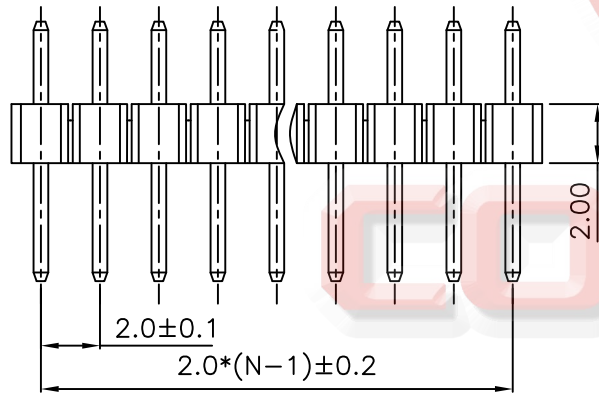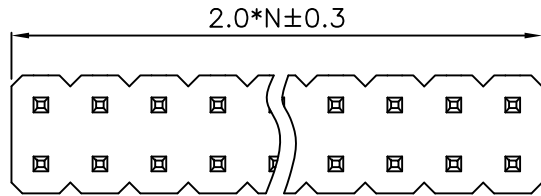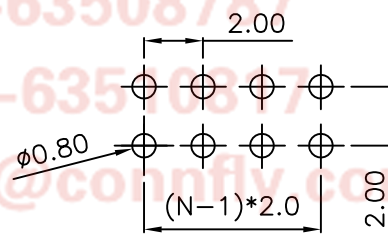

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/21/05'	~	LJC 06/21/05'
B	ADD DIM	LL 10/30/06'	~	LJC 10/30/06'
C	增加尺寸选项	YCH 07/27/10'	~	LJC 07/27/10'
D	ADD P/N CODE	JLZ 10/28/14'	~	

NOTES:


- MATERIAL&FINISHES
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
  - CURRENT RATING:1.5 Amp.
  - INSULATION RESISTANCE:1000MΩ Min.
  - DIELECTRIC WITHSTANDING:600VAC.
  - CONTACT RESISTANCE:20mΩ Max.
  - OPERATING TEMPERATURE:-40°C TO +105°C.
- PART NUMBER: DS1025-05
- PRODUCT NUMBER CODE:  
DS1025-05 - X X X X X X X X

- ① PLATING LEVEL(FOR GOLD ONLY)  
3A:LEVEL 3A B:LEVEL B
- TABLE A & DIM.A B TYPE  
1: TYPE 1  
15: TYPE 15
- CONTACTS TYPE  
V:VERTICAL TYPE  
HOUSING COLOR  
B:BLACK
- CONTACT PLATING  
8: FULL GOLD FLASH  
6: TIN
- CONNECTOR TYPE  
P:PLUG
- No.OF CONTACTS  
2\*2-2\*X
- SERIES No.  
DS1025-05

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1025-05-XXXXXX-D

PROJECTION	TITLE
UNITS mm	DUAL ROW STRAIGHT
SHEET SIZE A4	SERIES DS1025-05 SERIES

 晨翔电子有限公司  
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel:86-574-63508787  
Fax:86-574-63508787  
E-mail:sales@connfly.com  
http://www.v.com  
Add:East Industry Zone KuangYan  
Town Cixi Ningbo China  
P.C:315333