


1 2 3 4 5 6 7 8

A

DIMENSION:(UNIT:mm/inches)

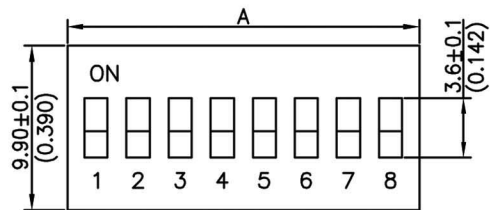

B

C

D


E

F




G

H


Operation Temperature: -20°C to 70°C  
Storage Temperature: -40°C to 85°C

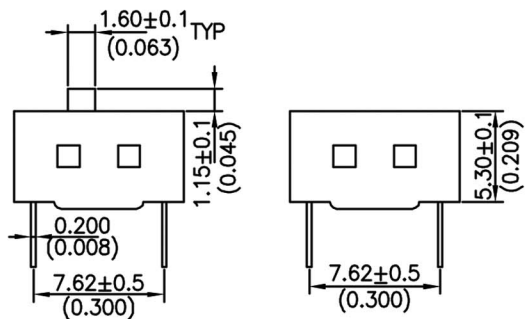

C8300-XXSLXJX0R C8300-XXSSXJX0R

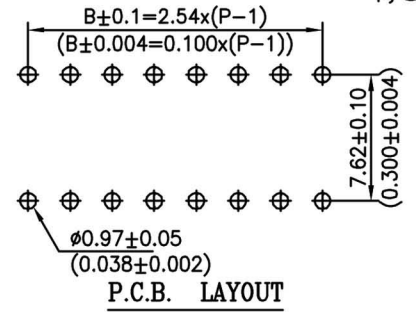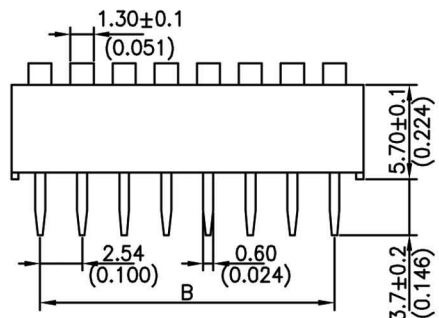

CIRCUIT DIAGRAM

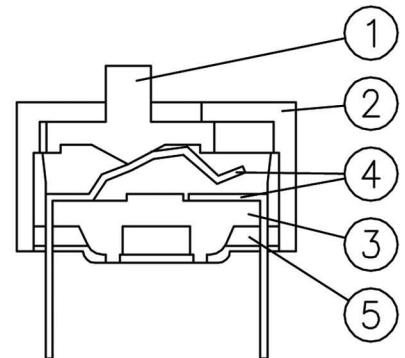

CONSTRUCTION

No.ofPOS	DIM.A	DIM.B
01	3.84(0.151)	—
02	6.08(0.239)	2.54(0.100)
03	8.92(0.351)	5.08(0.200)
04	11.16(0.439)	7.62(0.300)
05	13.70(0.539)	10.16(0.400)
06	16.24(0.639)	12.70(0.500)
07	19.08(0.751)	15.24(0.600)
08	21.32(0.839)	17.78(0.700)
09	24.16(0.951)	20.32(0.800)
10	26.40(1.039)	22.86(0.900)
12	31.48(1.239)	27.94(1.100)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	BLUE, RED.BLACK
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK

**RoHS Compliant**

**HSM 玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准		TOLERANCE 0-4 ±0.05 4-16 ±0.1 16-50 ±0.15	PART NAME 品名 DIP SWITCH SMT TYPE XXP GOLD 3U" PLATING ROHS
DWG. 製圖 <b>Hedy</b>	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 <b>C8300-XXSXXJX0R</b>
DATE 制表日 2013/06/04	PAGE 張數 1 / 1	REV. 版次 C	

1 2 3 4 5 6 7 8