

Features:

- Material: Phosphor bronze
- Used in H4130 series housing
- Wire range: #20 ~ #30 AWG
- Thickness: 0.2mm


Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

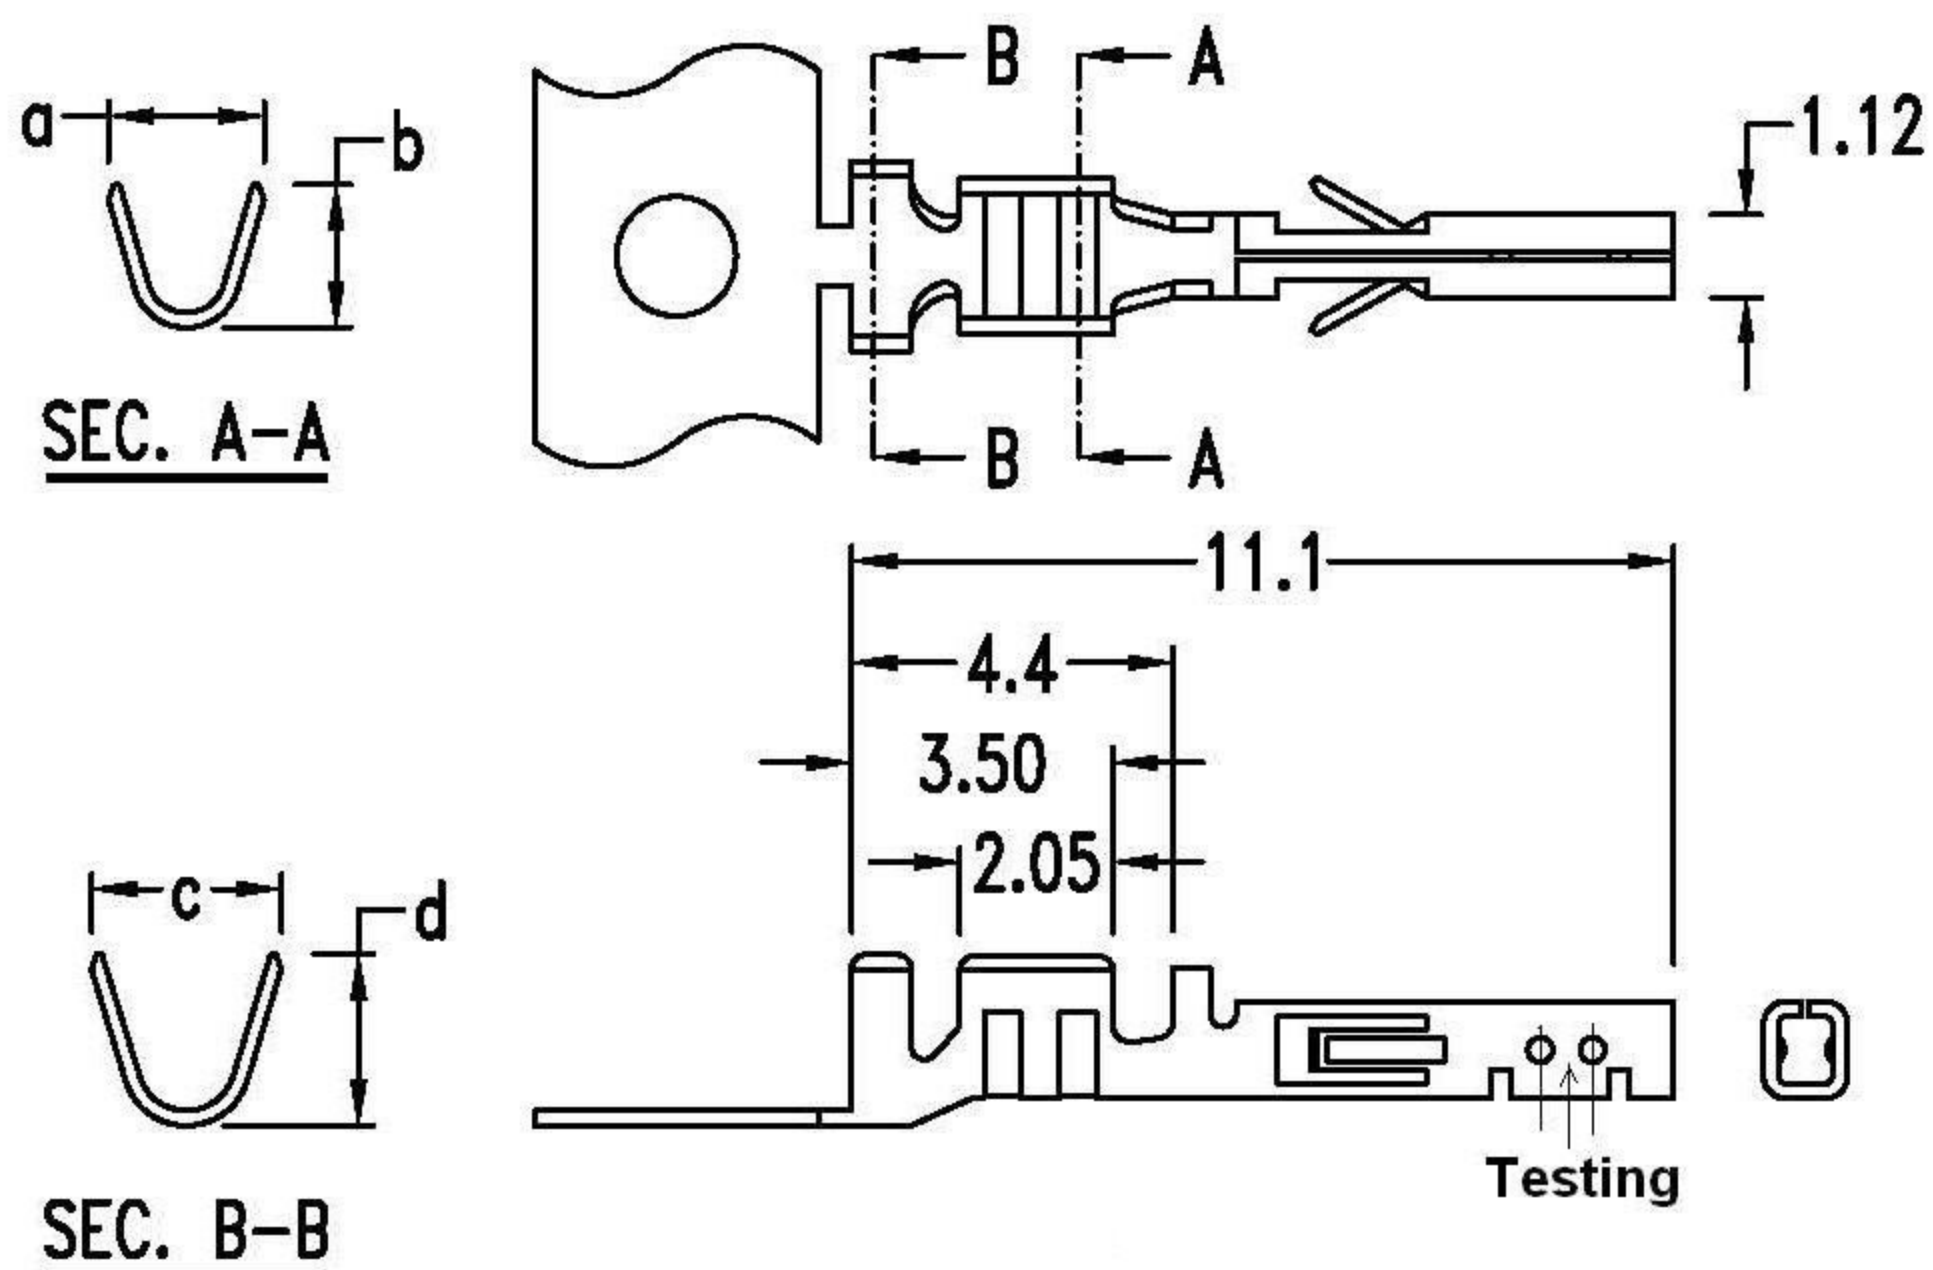

Ordering Information

Part No.	Finished	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
T4130-TPN00000R	Tin-plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9
T4130-SPN00000R	Gold flash in contact area. Others: Tin-plated					
T4130-GPN00000R	Gold flash					
T4130-TPG00000R	Tin-plated	#20 ~ #24 AWG	2.1	2.1	2.7	2.5
T4130-SPG00000R	Gold flash in contact area. Others: Tin-plated					
T4130-GPG00000R	Gold flash					

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准 HELEN	TOLERANCE .000 ± 0.05 .00 ± 0.15 .0 ± 0.25	PART NAME 品名 MICRO-FIT 3.0 FEMALE TERMINAL PHOSPHOR BRASS MATERIAL ROHS
DWG. 製圖 ABBY		
DATE 制表日 2011/08/05	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	SIZE 紙張尺寸 A4 REV. 版本 A
PART NO. 料號 T4130-XPX00000R		