
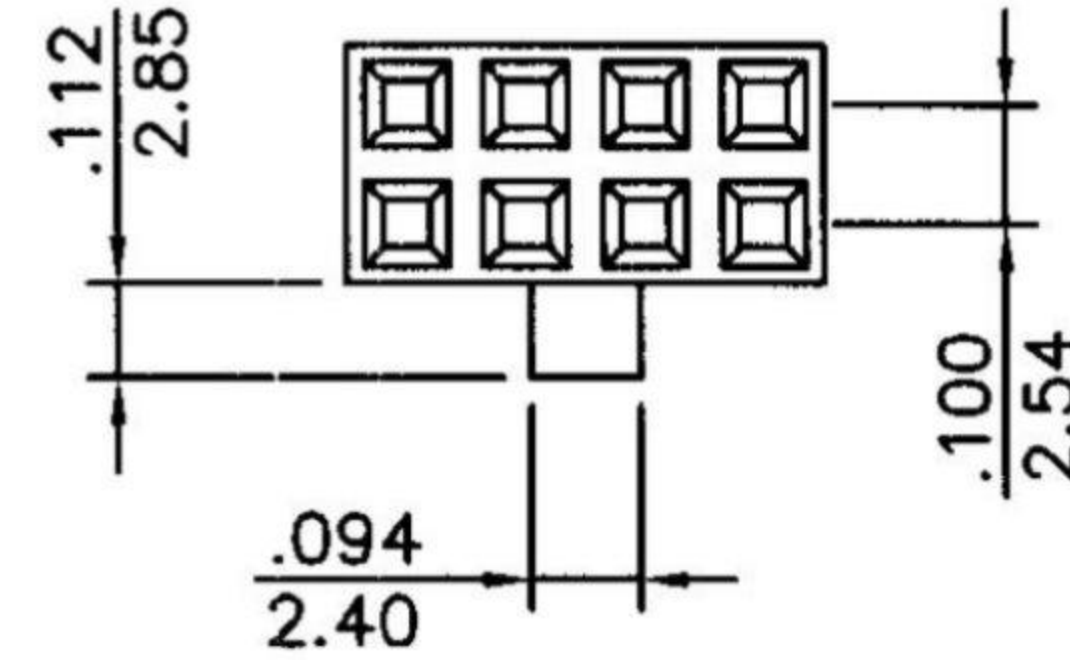


PN: H4000-XXPDNB00R



PN: H4000-XXPDYB00R

H 4000 — 02 P S N B 0 0 R  
 1 2 3 4 5 6 7 8 9 10

- |   |  |                                |
|---|--|--------------------------------|
| 1. PRODUCTS:<br>H:Housing   | 4. CONTACT TYPE:<br>P:Non Distribution                     | 7. INSULATOR COLOR:<br>B:Black |
| 2. SERIES NO.:<br>4000  | 5. ROW TYPE:<br>S:Single Row<br>D:Dual Rows                | 8. FILL IT WITH "0"            |
| 3. CONTACT NO.:<br>01-30(Single Row)<br>04(2x2)-80(2x40)<br>(Dual Rows) | 6. BODY OPTION:<br>Y:W/ Bump(Dual Rows Only)<br>N:W/O Bump | 9. FILL IT WITH "0"            |
|   |  | 10. R:ROHS                     |

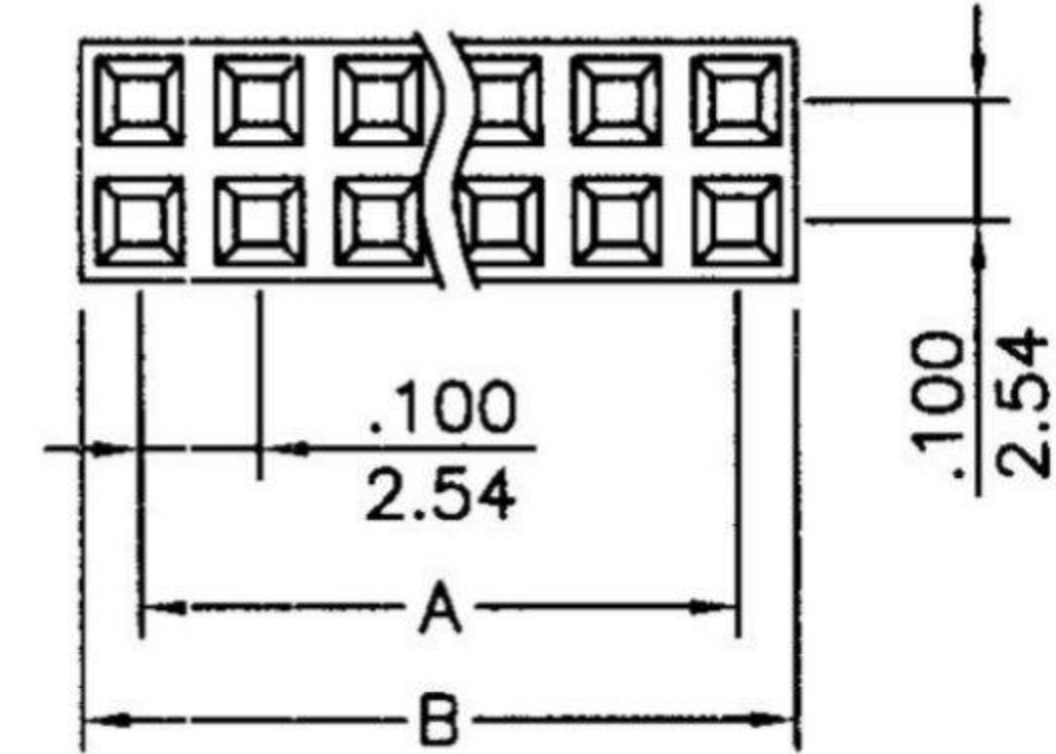


inches  
mm

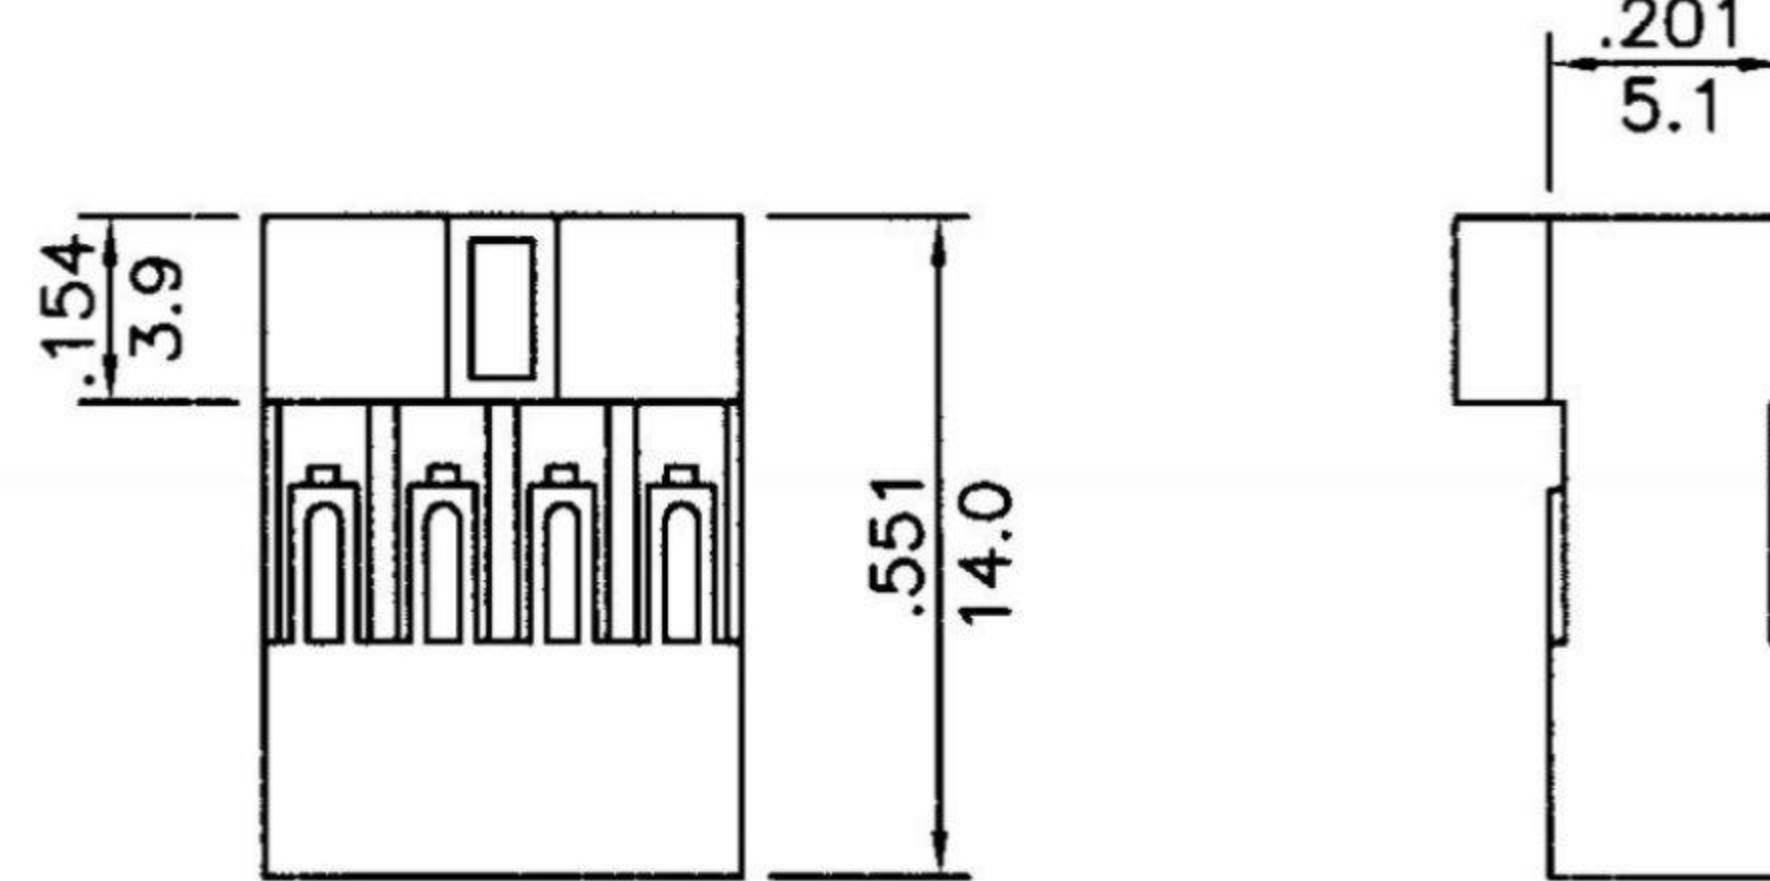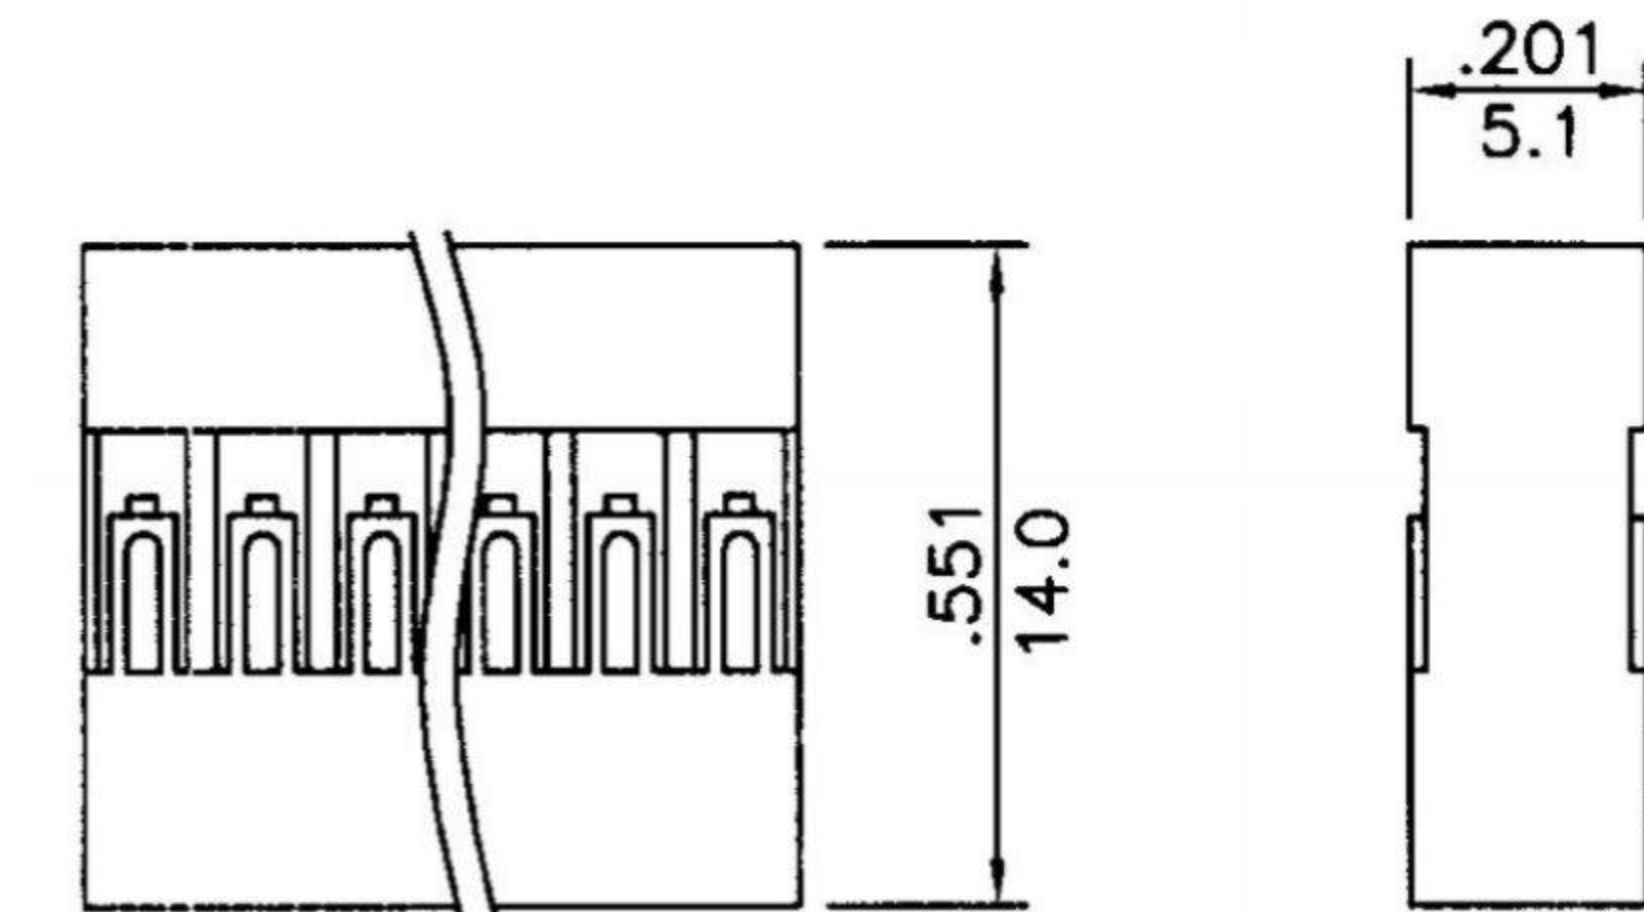

PN: H4000-KAX00000R

Polarizing Plug

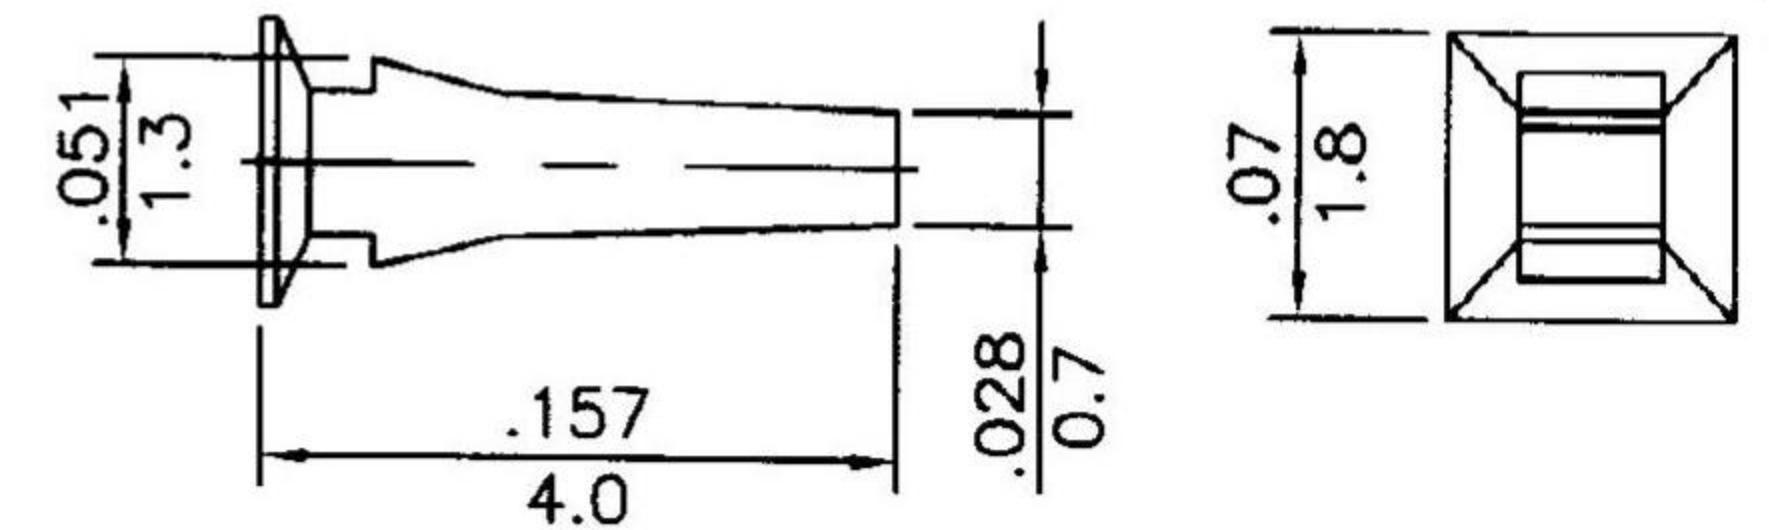

| CIRCUITS | DIMENSION in.(mm) |              | CIRCUITS | DIMENSION in.(mm) |               |
|----------|-------------------|--------------|----------|-------------------|---------------|
|          | A                 | B            |          | A                 | B             |
| 4        | 0.100(2.54)       | 0.200(5.08)  | 44       | 2.100(53.34)      | 2.200(55.88)  |
| 6        | 0.200(5.08)       | 0.300(7.62)  | 46       | 2.200(55.88)      | 2.300(58.42)  |
| 8        | 0.300(7.62)       | 0.400(10.16) | 48       | 2.300(58.42)      | 2.400(60.96)  |
| 10       | 0.400(10.16)      | 0.500(12.70) | 50       | 2.400(60.96)      | 2.500(63.50)  |
| 12       | 0.500(12.70)      | 0.600(15.24) | 52       | 2.500(63.50)      | 2.600(66.04)  |
| 14       | 0.600(15.24)      | 0.700(17.78) | 54       | 2.600(66.04)      | 2.700(68.58)  |
| 16       | 0.700(17.78)      | 0.800(20.32) | 56       | 2.700(68.58)      | 2.800(71.12)  |
| 18       | 0.800(20.32)      | 0.900(22.86) | 58       | 2.800(71.12)      | 2.900(73.66)  |
| 20       | 0.900(22.86)      | 1.000(25.40) | 60       | 2.900(73.66)      | 3.000(76.20)  |
| 22       | 1.000(25.40)      | 1.100(27.94) | 62       | 3.000(76.20)      | 3.100(78.74)  |
| 24       | 1.100(27.94)      | 1.200(30.48) | 64       | 3.100(78.74)      | 3.200(81.28)  |
| 26       | 1.200(30.48)      | 1.300(33.02) | 66       | 3.200(81.28)      | 3.300(83.82)  |
| 28       | 1.300(33.02)      | 1.400(35.56) | 68       | 3.300(83.82)      | 3.400(86.36)  |
| 30       | 1.400(35.56)      | 1.500(38.10) | 70       | 3.400(86.36)      | 3.500(88.90)  |
| 32       | 1.500(38.10)      | 1.600(40.64) | 72       | 3.500(88.90)      | 3.600(91.44)  |
| 34       | 1.600(40.64)      | 1.700(43.18) | 74       | 3.600(91.44)      | 3.700(93.98)  |
| 36       | 1.700(43.18)      | 1.800(45.72) | 76       | 3.700(93.98)      | 3.800(96.52)  |
| 38       | 1.800(45.72)      | 1.900(48.26) | 78       | 3.800(96.52)      | 3.900(99.06)  |
| 40       | 1.900(48.26)      | 2.000(50.80) | 80       | 3.900(99.06)      | 4.000(101.60) |
| 42       | 2.000(50.80)      | 2.100(53.34) | 100      | 4.900(124.46)     | 5.000(127.00) |

- \* Poles:4-80
  - \* Material:NORYL UL 94-V1 ,BLACK
- Specifications
- \* Current rating: 3A AC, DC
  - \* Voltage rating: 250V AC, DC
  - \* Temperature range: -25°C~+85°C
  - \* Insulation resistance: 1,000MΩ min.
  - \* Withstand voltage: 1000V AC/minute

|                        |  |   |
|------------------------|--|---|
| RoHS<br>Compliant      | HSM 玄茂科技股份有限公司<br>HSUAN MAO TECHNOLOGY CO., LTD. |   |
| APPD.<br>核准 HELEN      | TOLERANCE<br>容許公差<br>.0 ±<br>.00 ±<br>ANG. ±     | PART NAME 品名<br>2.54mm HOUSING DUAL ROW<br>2XXXP BLACK COLOR ROHS |
| DWG.<br>製圖 ABBY        | SCALE<br>比例 參考                                   | PART NO.<br>料號 H4000-XXPDXB00R                                    |
| DATE 制表日<br>2015/12/16 | UNIT<br>單位 MM                                    | SIZE.<br>紙張尺寸 A4  |
|                        | PAGE<br>張數 1 OF 1                                | REV.<br>版次 B  |