



### Model No.: GP177

<b>Type</b>	: Alkaline High Drain Button Cell	
<b>Chemical System</b>	: Alkaline Manganese Dioxide	
<b>Nominal Voltage</b>	: 1.5Volts	
<b>Nominal Dimensions</b>	: Ø6.80mm×2.60mm	
<b>Application</b>	: Analog Watch	
<b>Average Weight</b>	: 0.4g	
<b>Date Code</b>	: Unless otherwise specified, each cell Will carry a numeric year code and an alphabetical month code.	
<b>Shelf Life</b>	: Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 20 ± 2 °C 45-75%RH	
<b>Close Circuit Voltage</b>	: 1.40 Volts (min.)(load resistor 2kΩ at 20 ± 2 °C for 0.1 to 2 seconds)	
<b>Nominal Service Life(to 1.0V at 20 ±2 °C)</b>	: 460 hrs (at 50 kΩ load) 110 days (at 300 kΩ load)	
<b>Average Service Capacity (to 1.0V at 20 ±2 °C)</b>	: 12mAh(at 50 kΩ load)	
<b>Cross References:</b>		
IEC	JIS	Others
LR626SW	LR626	AG4

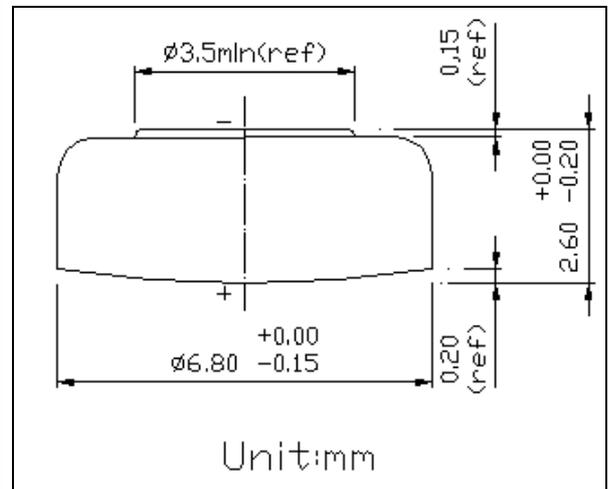

### Typical Discharge characteristics at 20 ± 2 °C

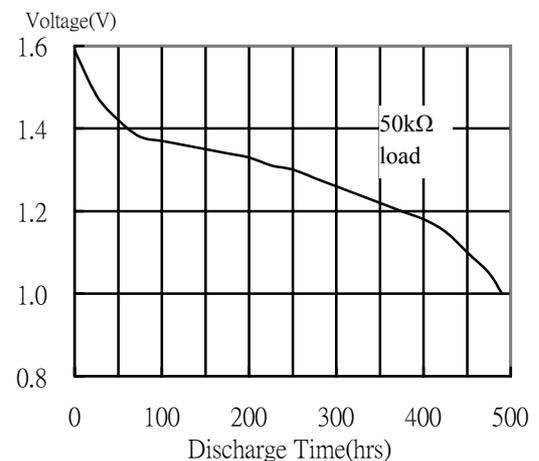

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.